



Brooklyn



Part of the Commercial Linear product category



Model Brooklyn Bi-Directional Cool White
Code ABROLED
Application Commercial, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	35W
Operating Temp	-20°C - 40°C
Lumens Delivered	4100lm
lm/W	117lm/W
CCT	4000K
UGR	22
Beam Angle	120

MATERIAL INFORMATION


Diffuser Material	Polystyrene
Product Weight without	2.954 kg
Packaging	
Colour / Finish	White
Height	22 mm

TECHNICAL INFORMATION

Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Suspended
Power Factor	0.9
L70 @ 25°C	L70 B50 50,000h

PRODUCT FEATURES

- High performance bi-directional suspendable LED linear suitable for retail and office applications
- Integral LED driver provides a unique aesthetically pleasing design
- White anodised aluminium frame
- Supplied c/w 1.2m suspension kit as standard
- 1-10V dimmable as standard

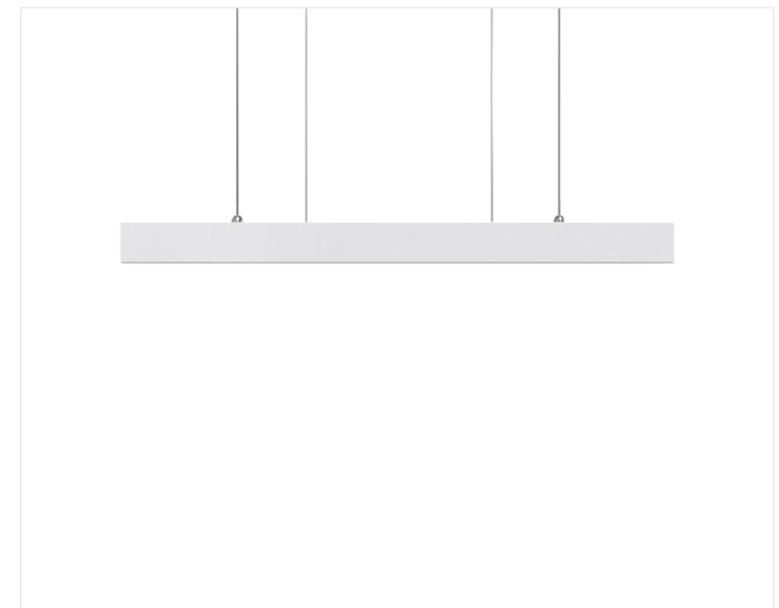



Brooklyn



Part of the Commercial Linear product category

Model	Brooklyn Bi-Directional Cool White
Code	ABROLED
Application	Commercial, Retail

