



|                      |   |
|----------------------|---|
| <b>Category</b>      | Downlights  |
| <b>Application</b>   | Ancillary, Commercial, Education, Healthcare, Hospitality, Retail |
| <b>Specification</b> | Performance   |

# Comfort EVO

Comfort EVO 2 Dual Output CCT Downlight White  
**Code: ACOM2/1**



## PRODUCT FEATURES

- Economic high performance CCT selectable IP44 downlight suitable for commercial and healthcare applications
- Deep cut-off angle for glare control and comfort
- Downlight design allows installation into existing hole cut-outs of 210mm
- Polycarbonate housing with unique thermal management for durability and optimum lifespan
- Intelligent and eco-friendly 3 part design allows end user the choice of either black or white reflector and trim accessories to add to the downlight (ACOM\*/1), offering great customisation and product upgradability
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2 outputs, in one luminaire
- Anti-Ligature kit available for installation in secure environments such as healthcare and educational facilities
- Dimmable and Emergency options, standard and Self-Test Emergency available using the Hawk Kit Emergency Pack

### GENERAL INFORMATION

|   |                         |
|---|-------------------------|
| <b>Wattage</b>                          | 17W - 21W               |
| <b>Lumens Delivered</b>                 | 2300lm - 2800lm (4000K) |
| <b>Lm/W</b>                             | 130lm/W (4000K)         |
| <b>Beam Angle</b>                       | 80                      |
| <b>CRI</b>                              | 80                      |
| <b>CCT</b>                              | 3000/4000K              |
| <b>Input</b>                            | 220-240V                |
| <b>Operating Temp</b>                   | -20°C - 25°C            |
| <b>SDCM</b>                             | 3                       |
| <b>UGR</b>                              | 23                      |
| <b>Cut-Out Size</b>                     | 210mm                   |
| <b>Energy efficiency class</b>          | F                       |
| <b>Product Weight without Packaging</b> | 0.38 kg                 |

### TECHNICAL INFORMATION



|                                       |             |
|---------------------------------------|-------------|
| <b>Light Source</b>                   | LED         |
| <b>Colour / Finish</b>                | White       |
| <b>IP Rating</b>                      | IP44        |
| <b>Class Protection</b>               | 2           |
| <b>Internal / External</b>            | Internal    |
| <b>Surface / Recessed / Suspended</b> | Recessed    |
| <b>Lumen Depreciation</b>             | L80 60,000h |
| <b>Warranty (Years)</b>               | 5           |
| <b>CE Mark</b>                        | Yes         |
| <b>Height</b>                         | 62 mm       |



|                      |   |
|----------------------|---|
| <b>Category</b>      | Downlights  |
| <b>Application</b>   | Ancillary, Commercial, Education, Healthcare, Hospitality, Retail |
| <b>Specification</b> | Performance   |

# Comfort EVO

Comfort EVO 2 Dual Output CCT Downlight White  
**Code:** ACOM2/1

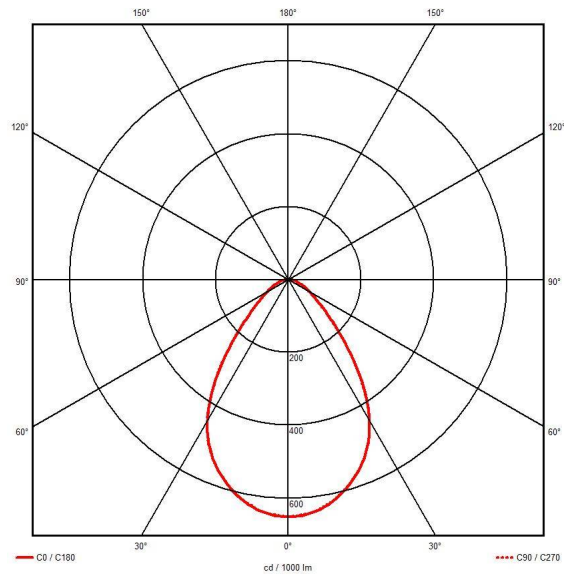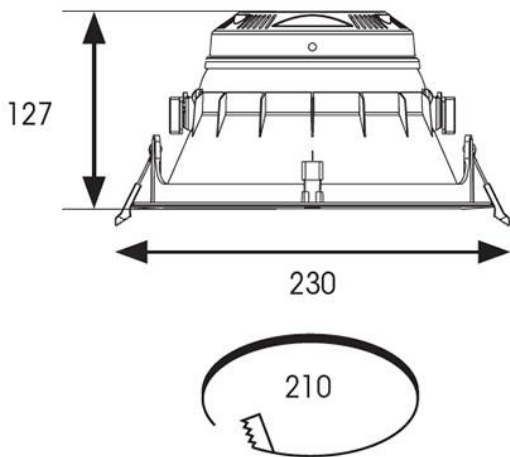

## ACCESSORIES

|             |  |
|-------------|--|
| ACOM/TR/W/1 | Comfort EVO White Reflector and Trim                           |
| ACOM/TR/B/1 | Comfort EVO Black Reflector and Trim                           |
| AARXDLK/1   | ARX Downlight Anti-Ligature Kit                                |
| AHUEMKIT/LI | Hawk Universal Lithium Emergency Kit Maintained/Non-maintained |

## MANDATORY ACCESSORIES

|             |                                      |
|-------------|--------------------------------------|
| ACOM/TR/W/1 | Comfort EVO White Reflector and Trim |
| ACOM/TR/B/1 | Comfort EVO Black Reflector and Trim |

