



<b>Category</b>	Emergency
<b>Application</b>	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
<b>Specification</b>	Performance

# EndLED

EndLED Lithium Exit Sign Maintained / Non-Maintained DALI Black  
**Code:** AENLED/LI/3M/DA/B



## PRODUCT FEATURES

- Low profile compact and modern polycarbonate LED exit box
- Self-test emergency as standard
- 20mm top and rear cable entries
- LiFePO4 Lithium battery provides improved energy consumption, product reliability and lifetime
- Supplied with all legend options - arrow down, arrow up and arrow left/right
- Available in black and white finishes

### GENERAL INFORMATION

Wattage	2.5W
Beam Angle	75
CRI	80
CCT	6500K
Input	220-240V
Operating Temp	5°C - 40°C
SDCM	5
Product Weight without Packaging	0.662 kg

### TECHNICAL INFORMATION

Light Source	LED
Colour / Finish	Black
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Wall
Lumen Depreciation	L70 54,000h
Warranty (Years)	6
CE Mark	Yes
Height	180 mm
Emergency Output Duration	3 Hr







<b>Category</b>	Emergency
<b>Application</b>	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
<b>Specification</b>	Performance

## EndLED

EndLED Lithium Exit Sign Maintained / Non-Maintained DALI Black  
**Code:** AENLED/LI/3M/DA/B

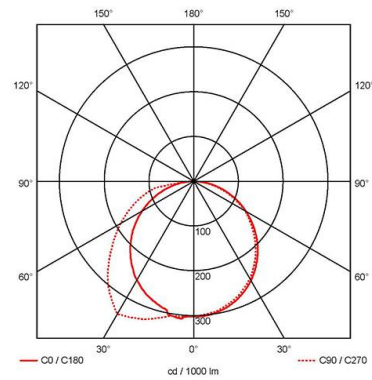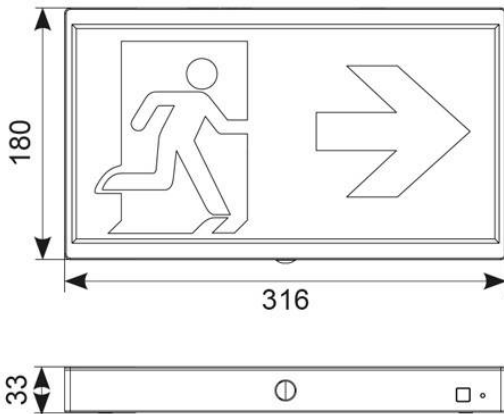

### SPARES

ASBP/18

3.2V 1500mAh Li-FePO4 Lithium Replacement Battery