



Category	Emergency
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Performance

EndLED

EndLED Lithium Exit Sign Maintained / Non-Maintained DALI Black

Code: AENLED/LI/3M/DA/B



- Low profile compact and modern polycarbonate LED exit box
- Self-test emergency as standard
- 20mm top and rear cable entries

- LiFePO4 Lithium battery provides improved energy consumption, product reliability and lifetime
- Supplied with all legend options - arrow down, arrow up and arrow left/right
- Available in black and white finishes

GENERAL INFORMATION	
Wattage	2.6W
Beam Angle	75
CRI	Ra 80
CCT	6500K+/-5000K
Input	220-240V
Operating Temp	5°C - 40°C
SDCM	6
Product Weight without Packaging	0.562 kg

TECHNICAL INFORMATION	
Light Source	LED
IP Rating	IP20
IK Rating	IK08
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Wall
Lumen Depreciation	L70 54,000h
Warranty (Years)	7
CE Mark	Yes
Height	180 mm
Emergency Output Duration	3 Hr





Category	Emergency
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Performance

EndLED

EndLED Lithium Exit Sign Maintained / Non-Maintained DALI Black

Code: AENLED/LI/3M/DA/B

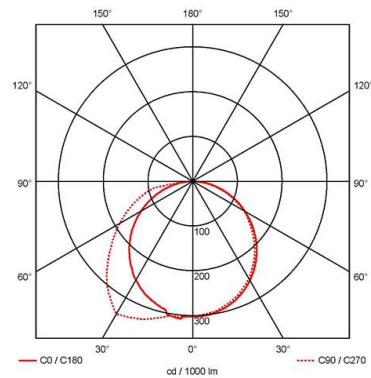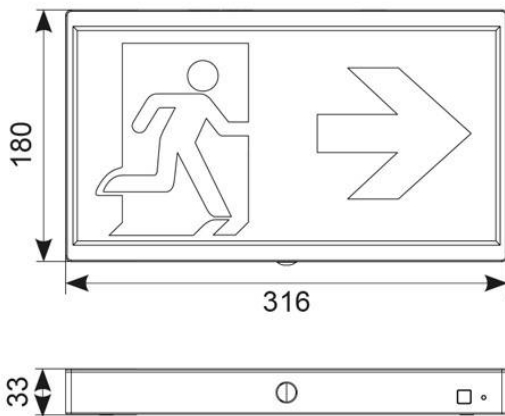

SPARES

ASBP/18

3.2V 1500mAh Li-FePO4 Lithium Replacement Battery