



# Ergo



Part of the Downlights product category

<b>Model</b>	Ergo CCT Downlight Black
<b>Code</b>	AERGO/1/BK
<b>Application</b>	Hospitality, Residential

## GENERAL INFORMATION

<b>Input</b>	220/240V
<b>Wattage</b>	4W
<b>Operating Temp</b>	-20°C - 45°C
<b>Lumens Delivered</b>	480lm (4000K)
<b>lm/W</b>	120lm/W
<b>CCT</b>	3000/4000/6500K
<b>UGR</b>	22
<b>Beam Angle</b>	40

## MATERIAL INFORMATION


<b>Main Material</b>	Polyamide
<b>Diffuser Material</b>	Polycarbonate
<b>Product Weight without Packaging</b>	0.07 kg
<b>Colour / Finish</b>	Black
<b>Diameter</b>	80 mm
<b>Height</b>	35 mm

## TECHNICAL INFORMATION

<b>Class Protection</b>	2
<b>Light Source</b>	LED
<b>SDCM (Initial Macadam)</b>	6
<b>CRI</b>	80
<b>Internal / External</b>	Internal
<b>Surface / Recessed / Suspended</b>	Recessed
<b>Power Factor</b>	0.70
<b>L70 @ 25°C</b>	L70 B50 25,000h

## PRODUCT FEATURES

- Compact polycarbonate LED downlight suitable for residential applications, including kitchens and soffit lighting.
- CCT selectable between 3000K, 4000K and 6500K
- Adjustable tiltable bezel, offering flexibility for use as a fixed downlight or gimbal
- IP44 rating as standard allows for a range of installation applications
- Low profile design with integral driver with loop-in

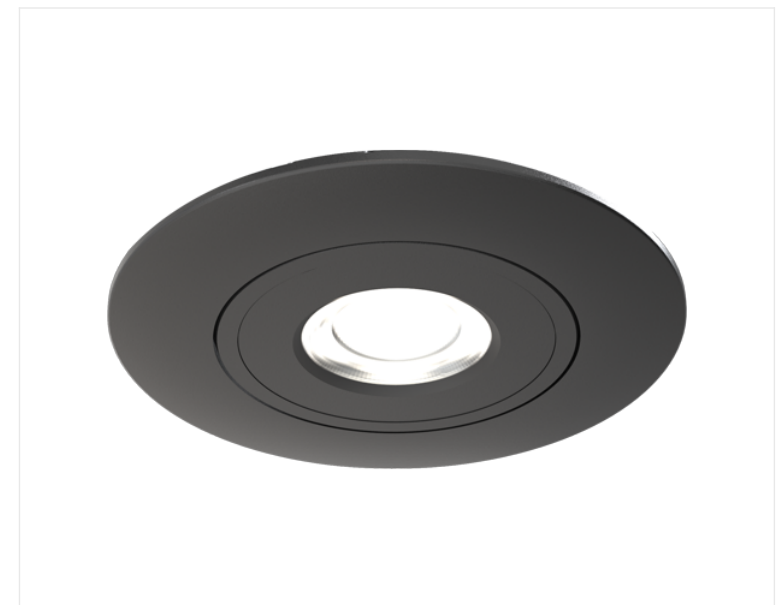



# Ergo



Part of the Downlights product category

**Model** Ergo CCT Downlight Black  
**Code** AERGO/1/BK  
**Application** Hospitality, Residential

