Ergo

Part of the Downlights product category

Model	Ergo CCT Downlight Black
Code	AERGO/1/BK
Application	Hospitality, Residential

GENERAL INFORMATION

Input	220/240V
Wattage	4W
Operating Temp	-20°C - 45°C
Lumens Delivered	480lm (4000K)
lm/W	120lm/W
CCT	3000/4000/6500K
UGR	22
Beam Angle	40

MATERIAL INFORMATION

Main Material	Polyamide
Diffuser Material	Polycarbonate
Product Weight without Packaging	0.07 kg
Colour / Finish	Black
Diameter	80 mm
Height	35 mm


TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.70
L70 @ 25°C	L70 B50 25,000h

PRODUCT FEATURES

- Compact polycarbonate LED downlight suitable for residential applications, including kitchens and soffit lighting.
- CCT selectable between 3000K, 4000K and 6500K
- Adjustable tiltable bezel, offering flexibility for use as a fixed downlight or gimbal
- IP44 rating as standard allows for a range of installation applications
- Low profile design with integral driver with loop-in



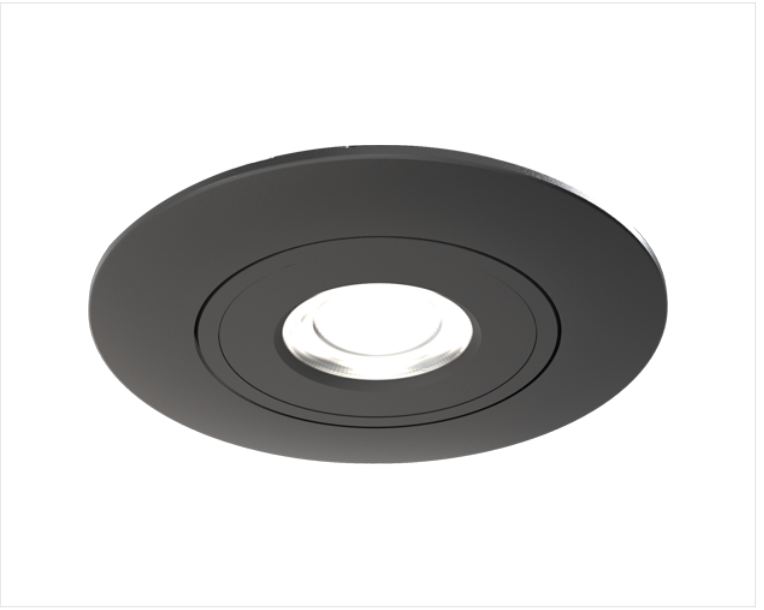

Ergo

Part of the Downlights product category

Model	Ergo CCT Downlight Black
Code	AERGO/1/BK
Application	Hospitality, Residential

