





Category	Commercial Panels
Application	Ancillary, Commercial, Education, Healthcare, Retail
Specification	Performance

Endurance 600x600

Endurance TP(a) 600x600 Panel Daylight

Code: AERMLED2/60/DL



- Edge lit LED panel suitable for education, commercial and ancillary area applications
- White anodised aluminium frame for visual compatibility with ceiling grid
- TPa as standard
- Self-Test Panel Pod and Sensor Pod compatible

- Cool white, warm white and daylight options
- Surface mounting frame option
- Switch Dim, DALI and 0-10V dimming capability using the multi dimmable driver accessories ADDIM/30/MC

GENERAL INFORMATION

Wattage	30W
Lumens Delivered	3100lm
Lm/W	102lm/W
Beam Angle	110
CRI	80
CCT	6000K
Input	220-240V
Operating Temp	-20°C - 40°C
SDCM	6
UGR	21
Cut-Out Size	585x585mm
Product Weight without Packaging	2.077 kg

TECHNICAL INFORMATION

Light Source	LED
Colour / Finish	White
IP Rating	IP40
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed, Surface, Suspended
Lumen Depreciation	L80 76,000h
Warranty (Years)	5
CE Mark	Yes
Accessories	AERMLED/SK, AERMLED/60/SMF, AERMLED/60/CGCB/KIT, APRK/60





Category	Commercial Panels
Application	Ancillary, Commercial, Education, Healthcare, Retail
Specification	Performance

Endurance 600x600

Endurance TP(a) 600x600 Panel Daylight

Code: AERMLED2/60/DL

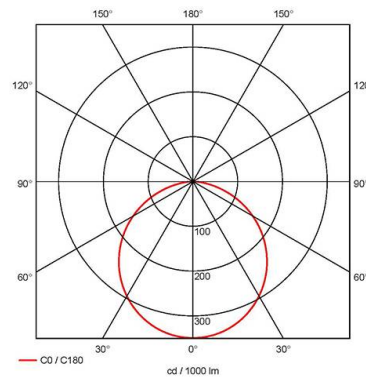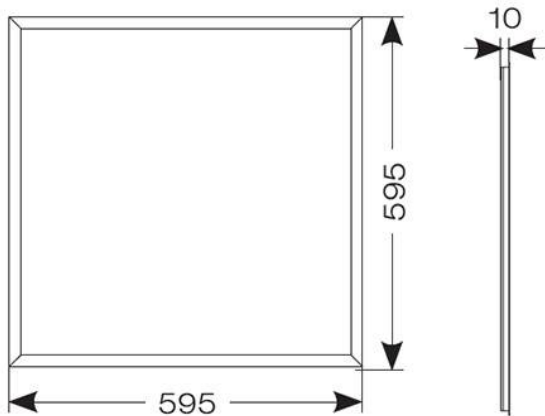

ACCESSORIES

APOD/1/3NM/DA	Panel Pod PRO DALI Emergency
AERMLED/SK	Endurance Panel Suspension Kit
ASMF60/1	Surface Mounting Frame 600x600
AERMLED/60/CGCB/KIT	Endurance 600x600 Concealed Grid Ceiling Kit
APRK/60	600x600 Plasterboard Recessed Kit
AARX60K/1	ARX 600x600 Anti-Ligature Kit
ASRF/60/1	600x600 Skylight Recessed Frame
ADDIM/30/MC	Multi-current Dimmable Driver 30W