



# Endurance



Part of the Commercial Panels product category

**Model** Endurance TP(a) UGR<19 600x600 Panel Warm White  
**Code** AERMLED3/60/WW  
**Application** Ancillary, Commercial, Education, Healthcare, Retail

## GENERAL INFORMATION

Input	220-240V
Wattage	31W
Operating Temp	-20? to 40?
Lumens Delivered	3400lm
lm/W	107lm/W
CCT	3000K
UGR	16
Beam Angle	80

## MATERIAL INFORMATION

Main Material	Aluminium
Diffuser Material	PS
Product Weight without Packaging	2.1 kg
Colour / Finish	White
Height	10 mm

## TECHNICAL INFORMATION


Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Ceiling, Recessed, Suspended
Power Factor	0.9
L70 @ 25°C	L70 B50 100,000h

## PRODUCT FEATURES

- Edge lit LED panel suitable for education, commercial and ancillary area applications
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Cool white, warm white and daylight options
- White anodised aluminium frame for visual compatibility with ceiling grid
- TP a as standard

## ACCESSORIES

APOD/1/3NM/DA	Panel Pod PRO DALI
AERMLED/SK	Endurance Panel Suspension Kit
ASMF60/1	Surface Mounting Frame 600x600
AERMLED/60/CGCB/KIT	Endurance 600x600 Concealed Grid Ceiling Kit
APRK/60	600x600 Plasterboard Recessed Kit
AARX60K/1	ARX 600x600 Anti-Ligature Kit
ASRF/60/1	600x600 Skylight Recessed Frame
ADDIM/30/MC	Multi-current Dimmable Driver 30W

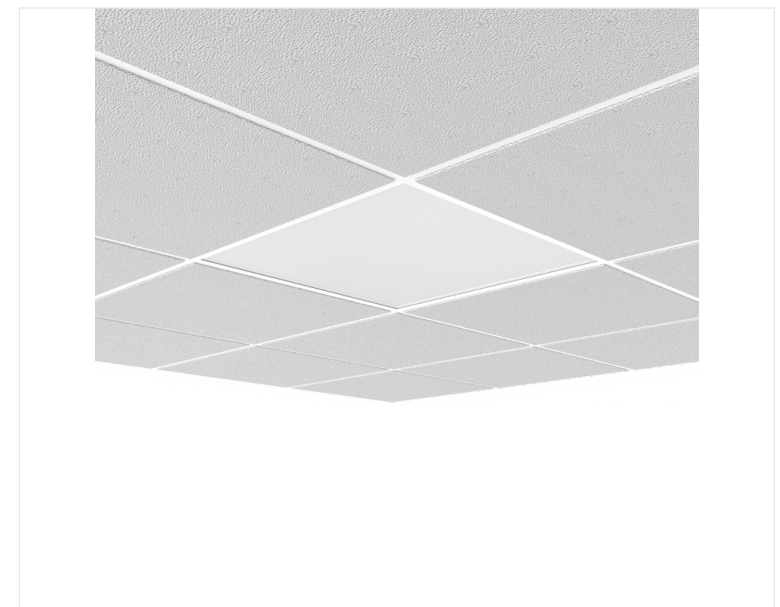



# Endurance



Part of the Commercial Panels product category

**Model** Endurance TP(a) UGR<19 600x600 Panel Warm White  
**Code** AERMLED3/60/WW  
**Application** Ancillary, Commercial, Education, Healthcare, Retail

