




Falcon

Falcon Surface Emergency Downlight IP65 Non-
Code: AFALED/3NM/ST/IP65/B

| | |
|---------------|---|
| Category | Emergency |
| Application | Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail |
| Specification | Architectural |

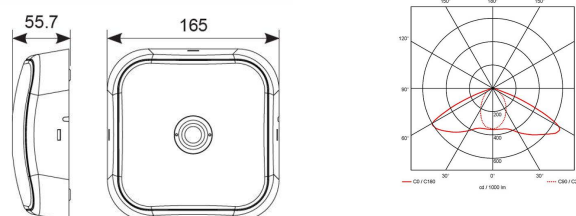

- Compact surface ultra-low profile recessed self-test emergency downlight
- High specification optic design and performance allows increased spacing providing reduced cost
- Up to 19.6 metres spacing between luminaires
- BESA mounting option
- Supplied with open area and escape route interchangeable lenses
- Available in black and white finishes
- Self-test as standard

| GENERAL INFORMATION | |
|----------------------------------|---|
| Wattage | 2.6W |
| Lumens Delivered | Open area - 153lm Escape route - 145lm |
| Lm/W | 59lm/W |
| Beam Angle | Open area - 96° / Escape route - 135x15 |
| CRI | 70 |
| CCT | 6500K |
| Input | 220-240V |
| Operating Temp | 0°C - 40°C |
| SDCM | 6 |
| Product Weight without Packaging | 0.55 kg |

| TECHNICAL INFORMATION | |
|--------------------------------|---------------------|
| Light Source | LED |
| Colour / Finish | Black |
| IP Rating | IP65 |
| Class Protection | 1 |
| Internal / External | Internal / External |
| Surface / Recessed / Suspended | Ceiling |
| Lumen Depreciation | L70 50,000h |
| Warranty (Years) | 7 |
| CE Mark | Yes |
| Height | 57.2 mm |

