



Category	Emergency
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Architectural

Falcon

Falcon Surface Emergency Downlight IP65 Non-Maintained White

Code: AFALED/3NM/ST/IP65



PRODUCT FEATURES

- Compact surface ultra-low profile recessed self-test emergency downlight
- High specification optic design and performance allows increased spacing providing reduced cost
- Up to 19.6 metres spacing between luminaires
- BESA mounting option
- Supplied with open area and escape route interchangeable lenses
- Available in black and white finishes
- Self-test as standard

GENERAL INFORMATION	
Wattage	2.6W
Lumens Delivered	Open area - 153lm Escape route - 145lm
Lm/W	59lm/W
Beam Angle	Open area - 96 / Escape route - 135x15
CRI	70
CCT	6500K
Input	220-240V
Operating Temp	0°C - 40°C
SDCM	6
Product Weight without Packaging	0.559 kg

TECHNICAL INFORMATION	
Light Source	LED
Colour / Finish	White
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling
Lumen Depreciation	L70 50,000h
Warranty (Years)	7
CE Mark	Yes
Height	57.2 mm
Emergency Output Duration	3 Hr





Category	Emergency
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Architectural

Falcon

Falcon Surface Emergency Downlight IP65 Non-Maintained White

Code: AFALED/3NM/ST/IP65

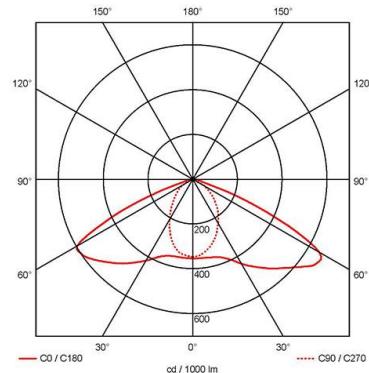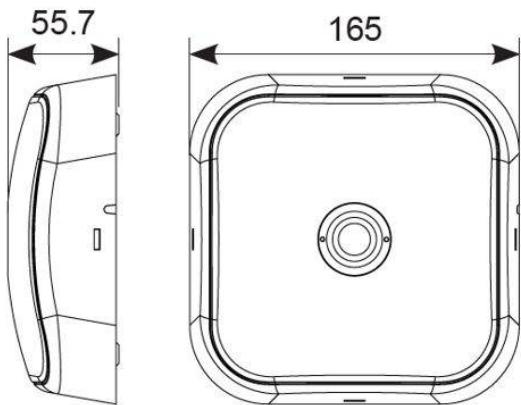

SPARES

ASBP/14/LI/2

3.2V 3000mAh LiFePO4 Battery - AFALED/3NM