Gabbro

7YR IP66 IK08 ON-SITE WARRANTY 2 YEARS

Part of the Streetlights product category

Model	Gabbro 1 Streetlight Grey
Code	AGAB1/1
Application	Education, Healthcare, Hospitality, Industrial, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	20W / 40W / 60W
Operating Temp	-20°C - 50°C
Lumens Delivered	3300lm / 6000lm / 9100lm (4000K)
lm/W	151lm/w (4000K)
CCT	3000K/4000K/5000K
Beam Angle	60/120

MATERIAL INFORMATION

Main Material	Aluminium+Polycarbonate
Diffuser Material	Polycarbonate
Product Weight without Packaging	3.7 kg
Colour / Finish	Anthracite

TECHNICAL INFORMATION

Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	70
Internal / External	External
Surface / Recessed / Suspended	Pole
Power Factor	0.9
L70 @ 25°C	L70 B10 153000h


PRODUCT FEATURES

- Modern die-cast aluminium street light ideal for carparks and large open areas
- CCT selectable between 3000K, 4000K and 5000K and power selectable; offering a choice of up to 3 outputs, in one luminaire
- 30° head tilt (15° up or down from horizontal) allows for a wider or more narrow light distribution
- Die-cast aluminium construction and breather gland for optimal heat dissipation and performance
- Integrated spirit level for easy levelling during installation

ACCESSORIES

ASL/WB/1	Streetlight Wall Bracket 60mm
AGAB/SBA/1	Gabbro 60mm Spigot Adaptor - Grey
AGAB/PC/1	Gabbro Nema Photocell
AGAB/PC/BK/1	Gabbro Nema Photocell Black



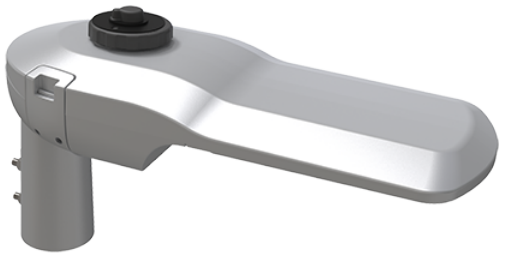

Gabbro

Part of the Streetlights product category

Model	Gabbro 1 Streetlight Grey
Code	AGAB1/1
Application	Education, Healthcare, Hospitality, Industrial, Retail

