




Application	Education, Healthcare, Hospitality, Industrial, Retail
Specification	Performance

Gabbro

Gabbro 1 Streetlight
Code: AGAB1/1



PRODUCT FEATURES

- Modern die-cast aluminium street light ideal for car parks and large open areas
- 30° head tilt (15° up or down from horizontal) allows for a wider or more narrow light distribution
- Integrated spirit level for easy levelling during installation
- 10kV Surge protection
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of up to 3 outputs, in one luminaire
- Die-cast aluminium construction and breather gland for optimal heat dissipation and performance
- Compatible with post top or side entry utility 76mm spigot
- NEMA socket as standard for photocell accessory

GENERAL INFORMATION

Wattage	20W / 40W / 60W
Lumens Delivered	3300lm / 6000lm / 9100lm (4000K)
Lm/W	151lm/w (4000K)
Beam Angle	60/120
CRI	70
CCT	3000K/4000K/5000K
Input	220-240V
Operating Temp	-20°C - 50°C
SDCM	5
Product Weight without Packaging	3.6 kg

TECHNICAL INFORMATION



Light Source	LED
Colour / Finish	Anthracite
IP Rating	IP66
IK Rating	IK08
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Pole
Lumen Depreciation	L80 96000h
Warranty (Years)	7
CE Mark	Yes



Application	Education, Healthcare, Hospitality, Industrial, Retail
Specification	Performance

Gabbro

Gabbro 1 Streetlight
Code: AGAB1/1

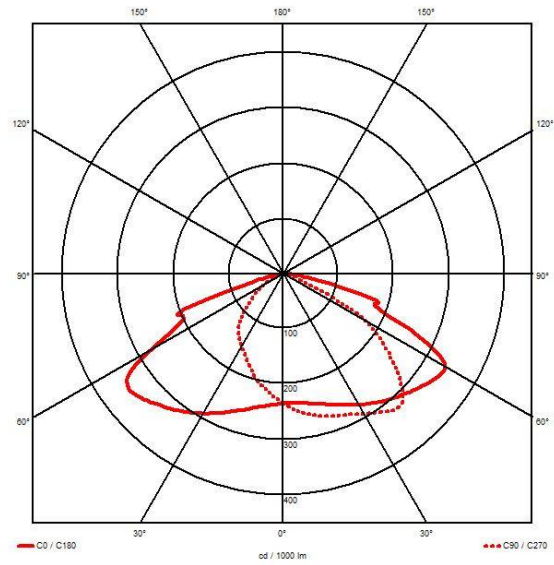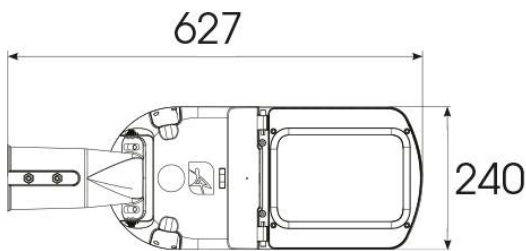

ACCESSORIES

AGAB/SBA/1	Gabbro 60mm Spigot Adaptor
AGAB/PC/1	Gabbro Nema Photocell

