



Unity Downlight

Part of the Downlights product category



Model	Unity GC Pro 1 Fixed Downlight Cool White
Code	AGCP1/1/CW
Application	Ancillary, Commercial, Hospitality, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	3W
Operating Temp	-20°C-25°C
Lumens Delivered	140lm
lm/W	47lm/W
CCT	4000K
UGR	10
Beam Angle	30

MATERIAL INFORMATION


Main Material	Aluminium
Product Weight without	0.09 kg
Packaging	
Colour / Finish	White
Diameter	50 mm
Height	53 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	95
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.4
L70 @ 25°C	L70 B50 100,000h

PRODUCT FEATURES

- Compact high performance architectural fixed downlight suitable for residential applications
- Deep cut-off angle for glare control and comfort
- Die-cast aluminium construction, powder coated
- Mirror finished anodized reflector for optimum light control
- Remote driver with plug and play connection

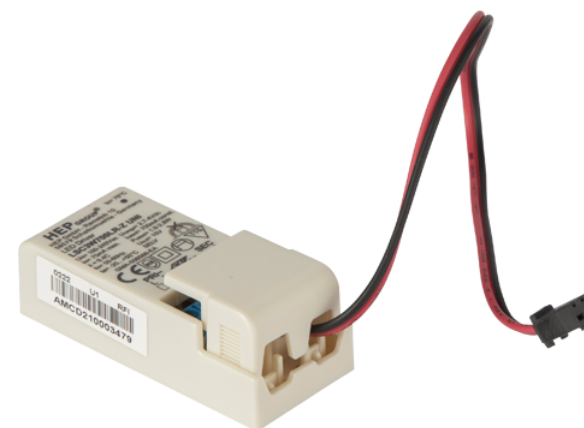



Unity Downlight

Part of the Downlights product category



Model	Unity GC Pro 1 Fixed Downlight Cool White
Code	AGCP1/1/CW
Application	Ancillary, Commercial, Hospitality, Residential, Retail

