



Gemini



Part of the Downlights product category

Model	Gemini UGR<19 Linear 1500mm
Code	AGEM5/1
Application	Ancillary, Commercial, Education, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	25W - 40W
Operating Temp	-20°C to 40°C
Lumens Delivered	3300lm - 5800lm (4000K)
lm/W	130lm/W - 150lm/W (4000K)
CCT	3000/4000/5000K
UGR	19
Beam Angle	90

MATERIAL INFORMATION


Main Material	Aluminium
Diffuser Material	Polycarbonate
Product Weight without Packaging	5.12 kg
Colour / Finish	White
Height	64 mm

TECHNICAL INFORMATION

Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Surface, Suspended
Power Factor	0.9

PRODUCT FEATURES

- High-specification linear luminaire suitable for commercial, educational, and healthcare applications
- CCT selectable between 3000K, 4000K and 5000K and power selectable; offering a choice of outputs, in one luminaire
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Microprism diffuser for enhanced photometric performance
- Intelligent design with easy install base plate and a push-up, clip-in body design, ensuring a quick and easy installation

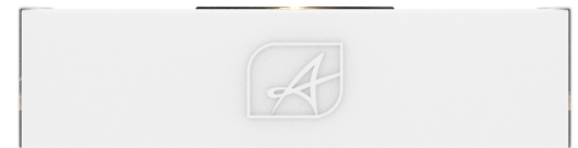



Gemini



Part of the Downlights product category

Model	Gemini UGR<19 Linear 1500mm
Code	AGEM5/1
Application	Ancillary, Commercial, Education, Retail

