




Guardian 110V Bulkhead

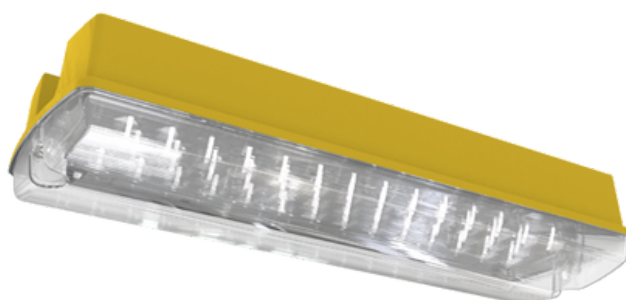

- 110V Ultra-slim profile LED polycarbonate bulkhead suitable for all types of 110V site lighting
- Supplied with self-adhesive legend
- 20mm side, end and rear cable entries
- Hinged screwless gear tray for ease of installation
- Viewing distance 18 metres

Features

Feature 1	110V Ultra-slim profile LED polycarbonate bulkhead suitable for all types of 110V site lighting
Feature 2	Supplied with self-adhesive legend
Feature 3	20mm side, end and rear cable entries
Feature 4	Hinged screwless gear tray for ease of installation
Feature 5	Viewing distance 18 metres

General Information

Lamp Type	LED
Emergency	Yes
Self Test	Yes



IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling, Recessed, Wall
Warranty (Years)	3
Material	Polycarbonate
Technical Information	
Wattage	4W
Lumens Delivered	160lm
Lm/W	40lm/W
Beam Angle	130
CRI	70
CCT	6500K
Input	110V
Hertz	50/60Hz
Operating Temp	0°C - 25°C
Lumen Depreciation	L70 50,000h
Power Factor	0.552

