



ICEL 001 - 050



Category	Emergency
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Performance

Guardian

Guardian Bulkhead Maintained / Non-Maintained White
Code: AGLED/3M

- Ultra-slim profile LED polycarbonate bulkhead
- Self-test as standard
- LiFePO4 Lithium battery provides improved energy consumption, product reliability and lifetime
- Viewing distance 18 metres

- Supplied with self-adhesive legend
- 20mm side, end and rear cable entries
- Quick release LED array/gear tray assembly provides the installer the means to faster installation/maintenance

GENERAL INFORMATION	
Wattage	3W
Lumens Delivered	167lm (Emergency)
Beam Angle	130
CRI	80
CCT	6500K
Input	220-240V
Operating Temp	5°C - 40°C
SDCM	6
Product Weight without Packaging	0.522 kg



TECHNICAL INFORMATION	
Light Source	LED
Colour / Finish	White
IP Rating	IP66
Class Protection	2
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling, Recessed, Wall
Lumen Depreciation	L70 36,000h
Warranty (Years)	5
CE Mark	Yes
Accessories	AGLED/KIT
Emergency Output Duration	3 Hr



Category	Emergency
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Performance

Guardian

Guardian Bulkhead Maintained / Non-Maintained White
Code: AGLED/3M

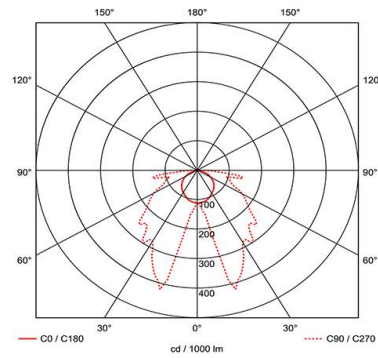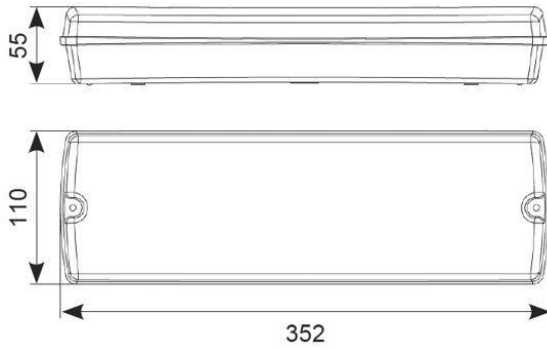

ACCESSORIES

AGLED/KIT	Guardian Bulkhead Semi-Recessing Kit White
-----------	--

SPARES

ASBP/30/LI	3.2V 1500mAh LiFePO4 Replacement Battery
------------	--