



Hope



Part of the Commercial Linear product category

Model	Hope CCT Asymmetric Linear
Code	AHOPL4/1
Application	Ancillary, Commercial, Healthcare

GENERAL INFORMATION

Input	220-240V
Wattage	18W-28W
Operating Temp	-25°C - 50°C
Lumens Delivered	2200lm - 3300lm (4000K)
lm/W	120lm/W (4000K)
CCT	3000/4000/5000K
UGR	24
Beam Angle	75/110

MATERIAL INFORMATION

Main Material	Aluminium
Diffuser Material	PS
Product Weight without Packaging	2.73 kg
Colour / Finish	White
Height	82 mm

TECHNICAL INFORMATION


Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.9
L70 @ 25°C	L70 B50 54,000h

PRODUCT FEATURES

- Asymmetrical recessed linear suitable for healthcare applications
- CCT selectable between 3000K, 4000K and 5000K and power selectable; offering a choice of 2 outputs, in one luminaire
- Specially designed angled polycarbonate diffuser provides asymmetric light output, directing the light down and outwards, allowing installation into the perimeter or corridor and circulation areas, perfect for healthcare applications
- Integral fixing clips allow for installation into plasterboard ceilings
- High efficiency up to 120lm/w

ACCESSORIES

ADDIM/50/MC	Multi-current Dimmable Driver 50W
AHUEMKIT/LI	Hawk Universal Lithium Emergency Kit Maintained/Non-maintained

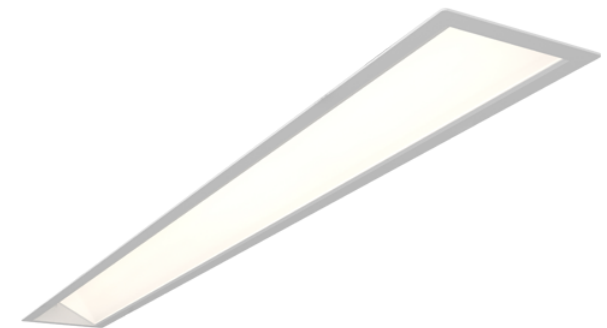



Hope



Part of the Commercial Linear product category

Model Hope CCT Asymmetric Linear
Code AHOPL4/1
Application Ancillary, Commercial, Healthcare

