



Category	Emergency
Application	Ancillary, Commercial, Education, Healthcare, Industrial, Retail
Specification	Performance

Panel Pod

Panel Pod Self-Test Emergency

Code: AIRMLED/POD/3NM/ST



PRODUCT FEATURES

- Integral Self-Test emergency pod to convert any Pace LED and Endurance LED panel to emergency, instantly
- Simple, quick twist and lock fixing
- Tri-colour LED shows green for healthy running condition, red/flashing for fault conditions and white for emergency operation
- Patent Protected. EP 2957826B (Europe)
- LiFePO4 Lithium battery provides improved energy consumption, product reliability and lifetime
- Supplied with a pre-wired 1 Metre cable for ease of installation
- Patent Protected. GB 2522285B (United Kingdom)
- ICEL Certified

GENERAL INFORMATION

Wattage	3.5W
Lumens Delivered	190lm
Beam Angle	120
CRI	65
CCT	6500K
Input	220-240V
Operating Temp	0°C - 40°C
Product Weight without Packaging	0.497 kg

TECHNICAL INFORMATION

Light Source	LED
Colour / Finish	White
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Warranty (Years)	7
CE Mark	Yes
Diameter	130 mm
Height	49 mm







Category	Emergency
Application	Ancillary, Commercial, Education, Healthcare, Industrial, Retail
Specification	Performance

Panel Pod

Panel Pod Self-Test Emergency

Code: AIRMLED/POD/3NM/ST

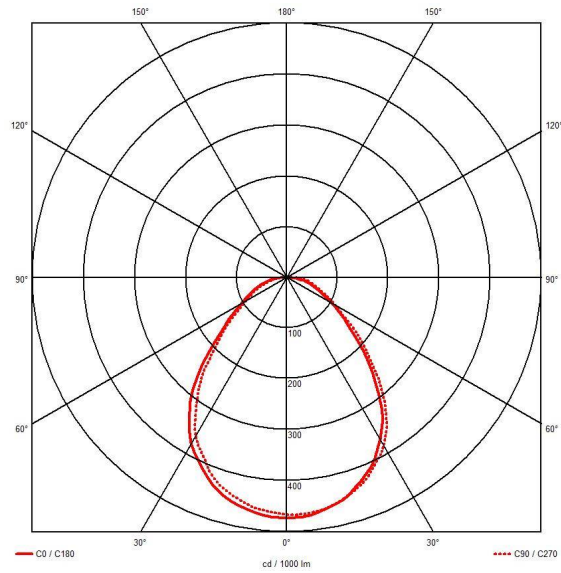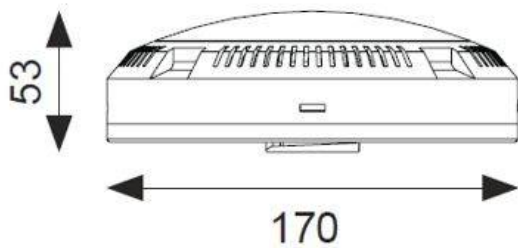

ACCESSORIES

ASBP/21 3.2V 2*3000mAh LiFePO4 Battery - AIRMLED/POD

SPARES

ASBP/21/2 3.2V 2*3000mAh LiFePO4 Battery - AIRMLED/POD

