



# Juno

Part of the Bulkheads product category



|                    |                               |
|--------------------|-------------------------------|
| <b>Model</b>       | Juno Recessed Modular         |
| <b>Code</b>        | AJUN/1                        |
| <b>Application</b> | Commercial, Education, Retail |

## GENERAL INFORMATION

|                         |                         |
|-------------------------|-------------------------|
| <b>Input</b>            | 220-240V                |
| <b>Wattage</b>          | 20W - 36W               |
| <b>Operating Temp</b>   | -10°C - 45°C            |
| <b>Lumens Delivered</b> | 2500lm - 4400lm (4000K) |
| <b>lm/W</b>             | 125lm/W (4000K)         |
| <b>CCT</b>              | 3000K/4000K/6500K       |
| <b>UGR</b>              | 18                      |
| <b>Beam Angle</b>       | 70                      |

## MATERIAL INFORMATION

|                                         |               |
|-----------------------------------------|---------------|
| <b>Main Material</b>                    | Aluminium     |
| <b>Diffuser Material</b>                | Polycarbonate |
| <b>Product Weight without Packaging</b> | 3.372 kg      |
| <b>Colour / Finish</b>                  | White         |
| <b>Height</b>                           | 595 mm        |

## TECHNICAL INFORMATION



|                                       |                 |
|---------------------------------------|-----------------|
| <b>Class Protection</b>               | 2               |
| <b>Light Source</b>                   | LED             |
| <b>SDCM (Initial Macadam)</b>         | 3               |
| <b>CRI</b>                            | 80              |
| <b>Internal / External</b>            | Internal        |
| <b>Surface / Recessed / Suspended</b> | Recessed        |
| <b>Power Factor</b>                   | 0.9             |
| <b>L70 @ 25°C</b>                     | L70 B50 54,000h |

## PRODUCT FEATURES

- Architectural LED recessed modular suitable for education, commercial and healthcare applications
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Dual direct / indirect output. Direct from the centre micro-prism line coupled with indirect output from the side diffuser sections. Providing a perfect combination for task and ambient lighting from one source.
- Black micro reflector and micro-prism diffuser ensure reduced glare and visual comfort
- Power and CCT selectable; offering a choice of 4 outputs and 3 colour temperature options, in one luminaire

## ACCESSORIES

|           |                               |
|-----------|-------------------------------|
| AARX60K/1 | ARX 600x600 Anti-Ligature Kit |
|-----------|-------------------------------|

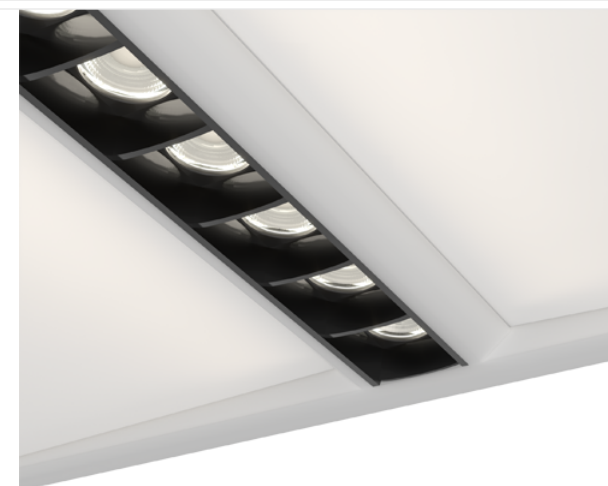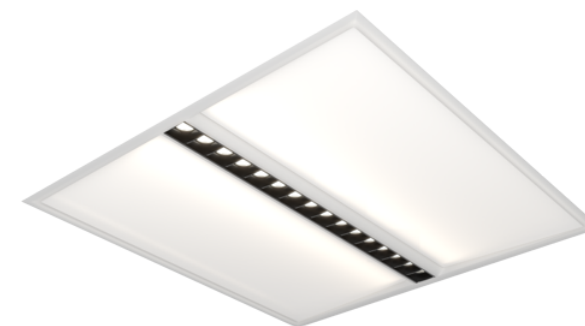



# Juno



Part of the Bulkheads product category



**Model** Juno Recessed Modular  
**Code** AJUN/1  
**Application** Commercial, Education, Retail

