



Category	Emergency
Application	Ancillary, Industrial
Specification	Performance

Kite

Kite Emergency Bulkhead Maintained / Non-Maintained White
Code: AKTLED/3M/ST

- Modern ultra-slim profile IP65 LED polycarbonate bulkhead
- Aesthetically designed for modern appearance
- 20mm side and rear cable entries
- Viewing distance 20 metres

- Self-test as standard
- Supplied with self-adhesive legend
- Hinged screwless gear tray for ease of installation

GENERAL INFORMATION	
Wattage	3W
Lumens Delivered	67lm (Emergency), 138lm (Standard)
Beam Angle	120
CRI	70
CCT	6500K
Input	220-240V
Operating Temp	0°C - 40°C
SDCM	6
Product Weight without Packaging	0.433 kg



TECHNICAL INFORMATION	
Light Source	LED
Colour / Finish	White
IP Rating	IP65
Class Protection	1
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling, Wall
Lumen Depreciation	L70 50,000h
Warranty (Years)	5
CE Mark	Yes
Height	120 mm
Emergency Output Duration	3 Hr



Category	Emergency
Application	Ancillary, Industrial
Specification	Performance

Kite

Kite Emergency Bulkhead Maintained / Non-Maintained White
Code: AKTLED/3M/ST

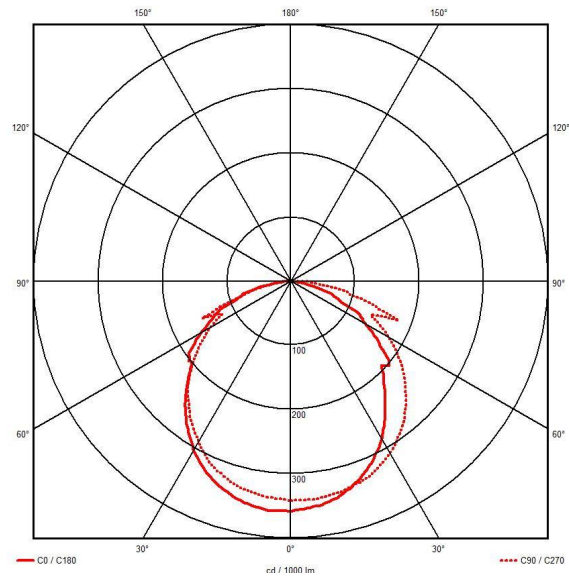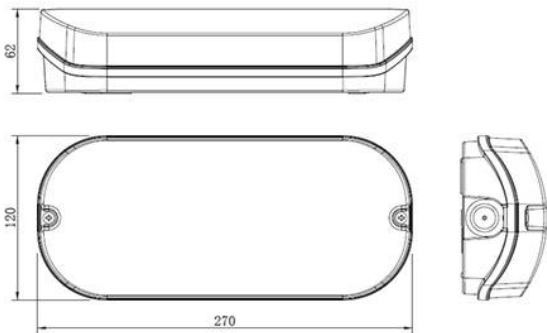

SPARES

ASBP/22/LI

3.2V 1000mAh Li-FePO4 Replacement Battery