



Lodi



Part of the Downlights product category

Model	Lodi Slim Downlight 95 Warm White
Code	ALODLED/95/WW
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	8W
Operating Temp	-15°C - 25°C
Lumens Delivered	750lm
lm/W	95lm/W
CCT	3000K
UGR	30
Beam Angle	115

MATERIAL INFORMATION

Main Material	Polycarbonate
Diffuser Material	Polycarbonate
Product Weight without Packaging	0.11 kg
Colour / Finish	White
Diameter	115 mm

TECHNICAL INFORMATION


Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.5
L70 @ 25°C	L70 B50 54,000h

PRODUCT FEATURES

- Economic circular LED performance downlight suitable for semi-commercial and residential applications
- Low profile design with integral driver
- Ideal for use in areas with shallow ceiling voids
- Supplied pre-wired with 300mm of cable

ACCESSORIES

ASLED/3NM	Signal Emergency Downlight Non-Maintained White
-----------	---

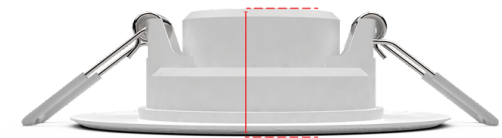



Lodi



Part of the Downlights product category

Model	Lodi Slim Downlight 95 Warm White
Code	ALODLED/95/WW
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Retail

