



Lota



Part of the Commercial Panels product category



Model Lota CCT Recessed Modular
Code ALOTLED
Application Commercial, Education, Healthcare

GENERAL INFORMATION

Input	220-240V
Wattage	31W
Operating Temp	-20°C - 40°C
Lumens Delivered	3200lm (4000K)
lm/W	110lm/W (4000K)
CCT	3000/4000/6500K
UGR	17
Beam Angle	85

MATERIAL INFORMATION


Main Material	Steel
Diffuser Material	PET, PS
Product Weight without Packaging	3.73 kg
Colour / Finish	White
Height	80 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.9
L70 @ 25°C	L70 B50 54,000h

PRODUCT FEATURES

- Recessed luminaire suitable for educational or commercial applications
- UGR<19 (unified glare rating) compliant luminaire ideal for most interior
- Selectable CCT between 3000K, 4000K and 6000K output
- Powder coated steel construction
- TP(a) as Standard

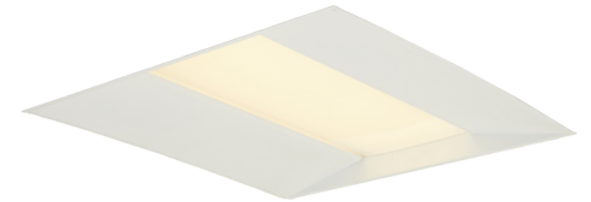



Lota



Part of the Commercial Panels product category



Model Lota CCT Recessed Modular
Code ALOTLED
Application Commercial, Education, Healthcare

