



Alto



Part of the Wall Lights product category

Model	Alto
Code	ALTOLED
Application	Hospitality, Outdoor, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	6W
Operating Temp	-20°C - 40°C
Lumens Delivered	320lm
lm/W	56lm/W
CCT	4000K
Beam Angle	90

MATERIAL INFORMATION


Diffuser Material	Glass
Product Weight without Packaging	1 kg
Colour / Finish	Graphite
Height	172 mm

TECHNICAL INFORMATION

Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal / External
Surface / Recessed / Suspended	Wall
Power Factor	0.7
L70 @ 25°C	L70 B50 50,000h

PRODUCT FEATURES

- Surface bi-directional die-cast wall light providing adjustable beam angle suitable for residential and hospitality applications
- Independent beam angle adjustment between up and down distribution
- Minimum beam angle 0°, maximum beam angle 90°
- Die-cast aluminium body with graphite powder coated anodized paint finish for enhanced durability
- Non-dimmable

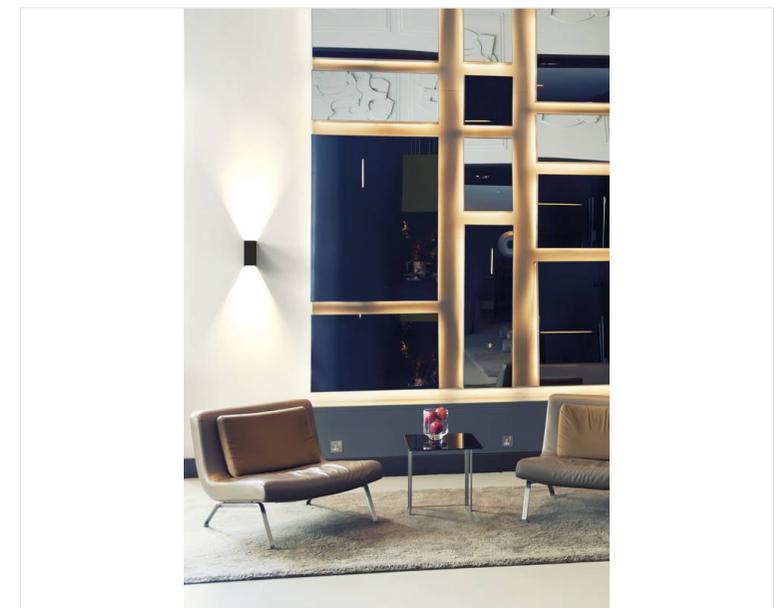



Alto



Part of the Wall Lights product category



Model Alto
Code ALTOLED
Application Hospitality, Outdoor, Residential, Retail

