



# Mattone



Part of the Feature Lighting product category

<b>Model</b>	Mattone Bricklight CCT Eyelid Black
<b>Code</b>	AMATB/EYE
<b>Application</b>	Hospitality, Outdoor, Residential, Retail

## GENERAL INFORMATION

<b>Input</b>	220-240V
<b>Wattage</b>	2W
<b>Operating Temp</b>	-10°C - 40°C
<b>Lumens Delivered</b>	100lm (4000K)
<b>lm/W</b>	51lm/W (4000K)
<b>CCT</b>	3000/4000K
<b>Beam Angle</b>	100

## MATERIAL INFORMATION

<b>Main Material</b>	Polycarbonate
<b>Diffuser Material</b>	Polycarbonate
<b>Product Weight without Packaging</b>	0.558 kg
<b>Colour / Finish</b>	Black
<b>Height</b>	106 mm

## TECHNICAL INFORMATION


<b>Class Protection</b>	1
<b>Light Source</b>	LED
<b>SDCM (Initial Macadam)</b>	6
<b>CRI</b>	80
<b>Internal / External</b>	External
<b>Surface / Recessed / Suspended</b>	Recessed
<b>L70 @ 25°C</b>	L70 B50 54,000h

## PRODUCT FEATURES

- Universal polycarbonate LED bricklight suitable for residential and hospitality applications
- Plain frame or eyelid option
- Unique adjustable feet allows for installation into multiple brick apertures ranging from 85mm to 115mm
- Polycarbonate construction ideal for coastal applications
- Pre-wired with 500mm of rubber insulated cable

## ACCESSORIES

AMATB/SMB	Mattone Bricklight CCT Surface Mounted Box
-----------	--

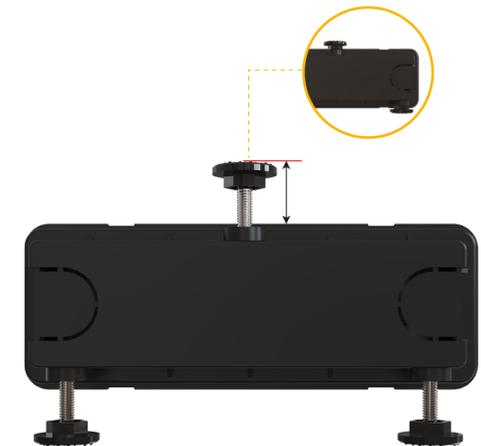



# Mattone



Part of the Feature Lighting product category

<b>Model</b>	Mattone Bricklight CCT Eyelid Black
<b>Code</b>	AMATB/EYE
<b>Application</b>	Hospitality, Outdoor, Residential, Retail

