



Mattone



Part of the Feature Lighting product category

Model	Mattone Bricklight CCT Black
Code	AMATBLED
Application	Hospitality, Outdoor, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	2W
Operating Temp	-10°C - 40°C
Lumens Delivered	100lm (4000K)
lm/W	51lm/W (4000K)
CCT	3000/4000K
Beam Angle	100

MATERIAL INFORMATION

Main Material	Polycarbonate
Diffuser Material	Polycarbonate
Product Weight without Packaging	0.56 kg
Colour / Finish	Black
Height	106 mm

TECHNICAL INFORMATION


Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	External
Surface / Recessed / Suspended	Recessed
Power Factor	0.4
L70 @ 25°C	L70 B50 54,000h

PRODUCT FEATURES

- Universal polycarbonate LED bricklight suitable for residential and hospitality applications
- Plain frame or eyelid option
- Unique adjustable feet allows for installation into multiple brick apertures ranging from 85mm to 115mm
- Polycarbonate construction ideal for coastal applications
- Pre-wired with 500mm of rubber insulated cable

ACCESSORIES

AMATB/SMB	Mattone Bricklight CCT Surface Mounted Box
-----------	--

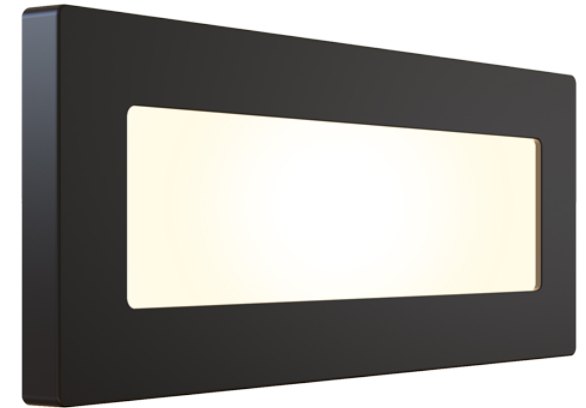



Mattone



Part of the Feature Lighting product category

Model	Mattone Bricklight CCT Black
Code	AMATBLED
Application	Hospitality, Outdoor, Residential, Retail

