



Category	Emergency
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Performance

Merlin

Merlin Emergency Downlight Non-Maintained Escape Route Black

Code: AMELED/ER/3NM/ST/B

PRODUCT FEATURES

- Ultra-low profile recessed self-test emergency downlight
- High specification optic design and performance allows increased spacing providing reduced cost
- Self-test as standard
- Option of escape route or open area models
- Available in black and white finishes
- Up to 17.8 metres spacing between luminaires

GENERAL INFORMATION

Wattage	5W
Lumens Delivered	235lm (Emergency)
Beam Angle	15/135
CRI	70
CCT	6500K
Input	220-240V
Operating Temp	0°C - 40°C
SDCM	6
Cut-Out Size	72mm
Product Weight without Packaging	0.695 kg

TECHNICAL INFORMATION

Light Source	LED
Colour / Finish	Black
IP Rating	IP20
IK Rating	IK08
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lumen Depreciation	L70 50,000h
Warranty (Years)	5
CE Mark	Yes
Diameter	85 mm
Height	63 mm
Emergency Output Duration	3 Hr







Category	Emergency
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Performance

Merlin

Merlin Emergency Downlight Non-Maintained Escape Route Black

Code: AMELED/ER/3NM/ST/B

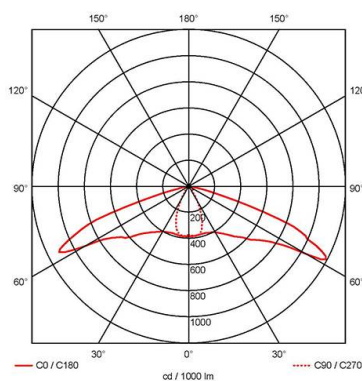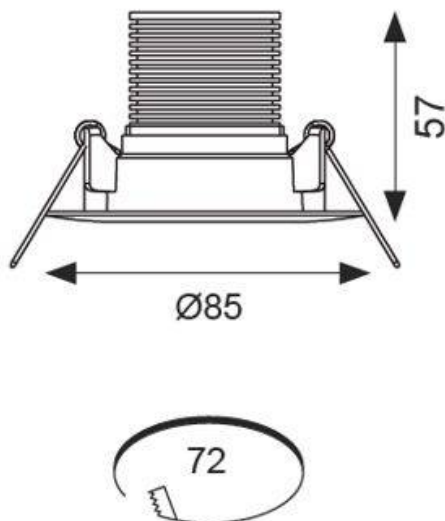

SPARES

ASBP/9/LI

3.2V 5500mAh-5 Li-FePO4 Replacement Battery