

| | |
|---------------|---|
| Category | Emergency |
| Application | Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail |
| Specification | Performance |

Merlin

Merlin Emergency Downlight Non-Maintained Open Area Black

Code: AMELED/OA/3NM/ST/B



PRODUCT FEATURES


- Ultra-low profile recessed self-test emergency downlight
- High specification optic design and performance allows increased spacing providing reduced cost
- Self-test as standard
- Option of escape route or open area models
- Available in black and white finishes
- Up to 17.8 metres spacing between luminaires

GENERAL INFORMATION

| | |
|----------------------------------|-------------------|
| Wattage | 5W |
| Lumens Delivered | 211lm (Emergency) |
| Beam Angle | 110 |
| CRI | 70 |
| CCT | 6500K |
| Input | 220-240V |
| Operating Temp | 0°C - 40°C |
| SDCM | 6 |
| Cut-Out Size | 72mm |
| Product Weight without Packaging | 0.694 kg |

TECHNICAL INFORMATION

| | |
|--------------------------------|-------------|
| Light Source | LED |
| Colour / Finish | Black |
| IP Rating | IP20 |
| IK Rating | IK08 |
| Class Protection | 1 |
| Internal / External | Internal |
| Surface / Recessed / Suspended | Recessed |
| Lumen Depreciation | L70 50,000h |
| Warranty (Years) | 5 |
| CE Mark | Yes |
| Diameter | 85 mm |
| Height | 63 mm |
| Emergency Output Duration | 3 Hr |


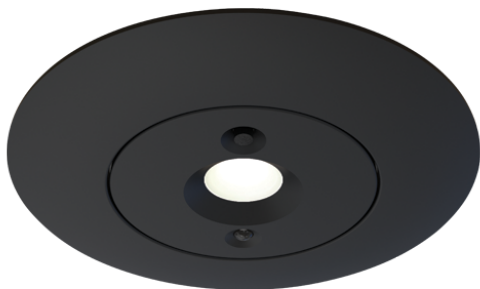


| | |
|---------------|---|
| Category | Emergency |
| Application | Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail |
| Specification | Performance |

Merlin

Merlin Emergency Downlight Non-Maintained Open Area Black

Code: AMELED/OA/3NM/ST/B

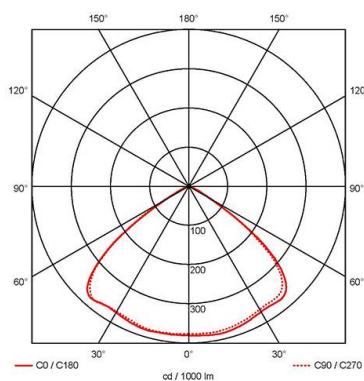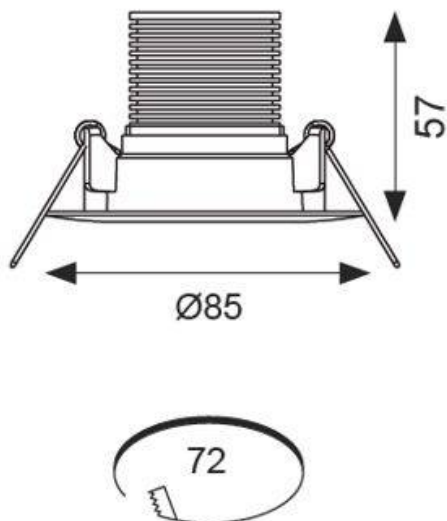

SPARES

ASBP/9/LI

3.2V 5500mAh-5 Li-FePO4 Replacement Battery