



<b>Category</b>	Emergency
<b>Application</b>	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
<b>Specification</b>	Performance

# Merlin

Merlin Emergency Downlight Non-Maintained Open Area White  
**Code:** AMELED/OA/3NM/ST

- Ultra-low profile recessed self-test emergency downlight
- High specification optic design and performance allows increased spacing providing reduced cost
- Self-test as standard
- Option of escape route or open area models
- Available in black and white finishes
- Up to 17.8 metres spacing between luminaires

GENERAL INFORMATION	
Wattage	5W
Lumens Delivered	274lm (Emergency)
Beam Angle	110
CRI	70
CCT	6500K
Input	220-240V
Operating Temp	0°C - 40°C
SDCM	6
Cut-Out Size	72mm
Product Weight without Packaging	0.694 kg



TECHNICAL INFORMATION	
Light Source	LED
Colour / Finish	White
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lumen Depreciation	L70 50,000h
Warranty (Years)	5
CE Mark	Yes
Diameter	85 mm
Height	63 mm
Emergency Output Duration	3 Hr



<b>Category</b>	Emergency
<b>Application</b>	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
<b>Specification</b>	Performance

# Merlin

Merlin Emergency Downlight Non-Maintained Open Area White  
**Code:** AMELED/OA/3NM/ST

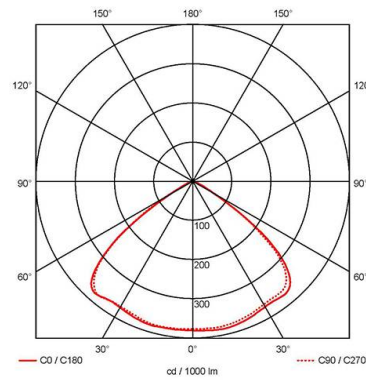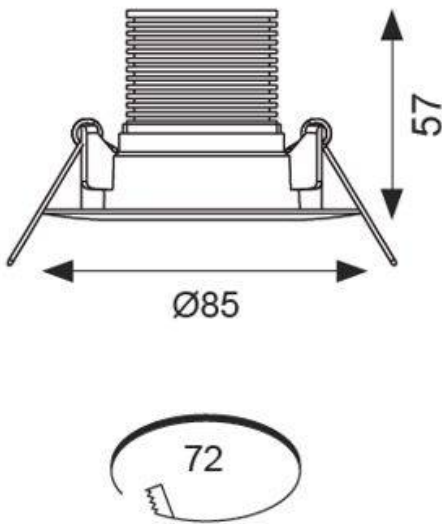

## SPARES

ASBP/9/LI 3.2V 5500mAh-5 Li-FePO4 Replacement Battery