Mercurial

Part of the Bulkheads product category

Model	Mercurial 1 IP54 2CCT Multi Wattage Silver
Code	AMER1/1/S
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Outdoor, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	13W - 20W
Operating Temp	-20°C - 40°C
Lumens Delivered	1900lm - 2700lm (4000K)
lm/W	135lm/W (4000K)
CCT	3000/4000K
Beam Angle	120

MATERIAL INFORMATION

Main Material	Polycarbonate
Diffuser Material	Polycarbonate
Product Weight without Packaging	1.21 kg
Colour / Finish	Silver
Diameter	370 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Ceiling, Wall
Power Factor	0.8
L70 @ 25°C	L70 B50 60,000h

PRODUCT FEATURES

- Utility LED wall/ceiling luminaire suitable for education and commercial applications and ancillary areas
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2 outputs, in one luminaire (AMER1/1/** only)
- Corridor function options available for effective reduction in energy consumption
- Side conduit entry covers retain sleek appearance when not in use
- Clip in gear tray ensures quick installation

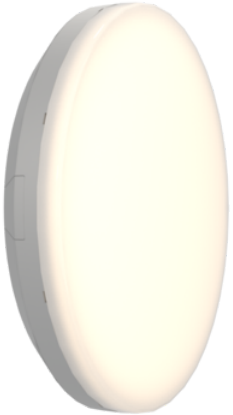

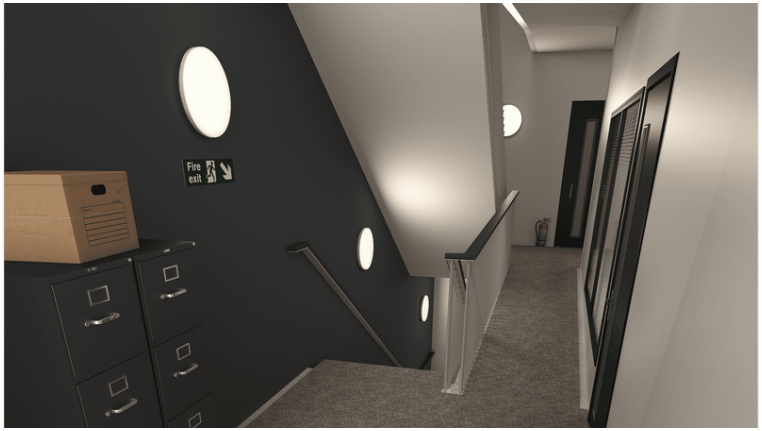

Mercurial

Part of the Bulkheads product category

Model	Mercurial 1 IP54 2CCT Multi Wattage Silver
Code	AMER1/1/S
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Outdoor, Retail

