



Anzo



Part of the Downlights product category

Model	Anzo MultiLED 300mm CCT Adjustable Downlight Triac Dimmable
Code	ANZOLED300/CCT/DIM
Application	Ancillary, Commercial, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	22W
Operating Temp	-10°C - 40°C
Lumens Delivered	2600lm (4000K)
lm/W	116lm/W (4000K)
CCT	3000/4000/6000K
UGR	25
Beam Angle	110

MATERIAL INFORMATION


Main Material	Polycarbonate
Diffuser Material	Polystyrene
Product Weight without Packaging	0.68 kg
Colour / Finish	White
Diameter	300 mm
Height	20 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Ceiling, Recessed
Power Factor	0.9
L70 @ 25°C	L70 B50 54,000h

PRODUCT FEATURES

- Ultra-slim adjustable LED performance downlight suitable for semi-commercial and residential applications
- Integrated CCT selector switch allows the installer to choose the CCT between 3000K, 4000K and 6000K
- Innovative bracket / spring design for variable cut-outs from 120-260mm
- Pre-wired with 300mm cable

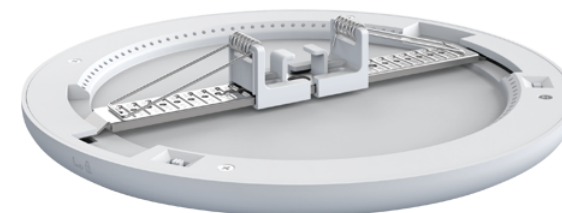



Anzo



Part of the Downlights product category

Model Anzo MultiLED 300mm CCT Adjustable Downlight Triac Dimmable
Code ANZOLED300/CCT/DIM
Application Ancillary, Commercial, Residential, Retail

