



Opti-Lux Pro

Part of the High/Low Bay product category



Model	Opti-Lux Pro Linear Highbay
Code	AOPX/1
Application	Retail

GENERAL INFORMATION

Input	220-240V
Wattage	60W/100W/150W/200W
Operating Temp	-30°C - 50°C
Lumens Delivered	9,800lm - 30,000lm (4000K)
lm/W	155lm/W
CCT	3000K/4000K
Beam Angle	120°

MATERIAL INFORMATION

Main Material	Steel
Diffuser Material	Polycarbonate
Product Weight without Packaging	5.88 kg
Colour / Finish	White
Height	98 mm

TECHNICAL INFORMATION


Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Ceiling, Surface, Suspended
Power Factor	0.9
L70 @ 25°C	179000

PRODUCT FEATURES

- LED low bay suitable for retail and commercial applications
- Aimed at the warehouse style retail market with etched diffuser for low glare output
- 4 x Power (150lm/W) and 2 x Colour Selectable (3000K/4000K)
- Fast install/wiring via access hatch on the back of the product with push fit terminals
- Zhaga 18 socket or 1-10V dimmable operation

ACCESSORIES

AZH/PIR/IP65/1	Zhaga IP65 PIR Sensor
AZH/MWS/IP65/1	Zhaga IP65 Microwave Sensor
AZH/PIR/OCTO/IP65/1	Zhaga IP65 PIR OCTO Sensor
AZH/OCTO/IP65/1	Zhaga IP65 OCTO Casambi Module

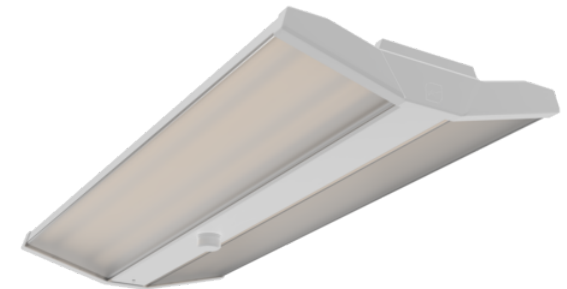



Opti-Lux Pro

Part of the High/Low Bay product category



Model	Opti-Lux Pro Linear Highbay
Code	AOPX/1
Application	Retail

