




Category	Emergency
Application	Industrial
Specification	Performance

Osprey High Rack

Osprey High Rack Bulkhead Lithium Maintained / Non-Maintained
Code: AOSLED/3M/ST



PRODUCT FEATURES

- Modern slim profile IP65 LED polycarbonate bulkhead
- High performance LEDs and optical performance allows increased spacing ratios
- Aesthetically designed for modern appearance
- Compact high polished reflector design to provide required light level from high mounting heights
- Self-test as standard
- 20mm side and rear cable entries

GENERAL INFORMATION

Wattage	8W
Lumens Delivered	405lm (Emergency), 550lm (Standard)
Beam Angle	60/100
CRI	70
CCT	6500K
Input	220-240V
Operating Temp	0°C - 40°C
SDCM	6
Product Weight without Packaging	0.89 kg

TECHNICAL INFORMATION

Light Source	LED
Colour / Finish	White
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling, Wall
Lumen Depreciation	L70 50,000h
Warranty (Years)	7
CE Mark	Yes
Height	69 mm
Emergency Output Duration	3 Hr





Category	Emergency
Application	Industrial
Specification	Performance

Osprey High Rack

Osprey High Rack Bulkhead Lithium Maintained / Non-Maintained

Code: AOSLED/3M/ST

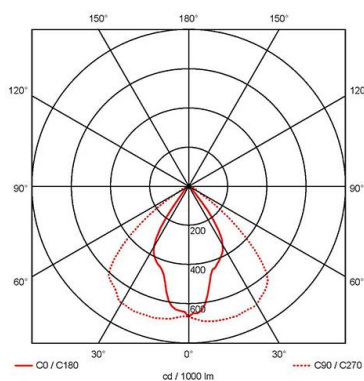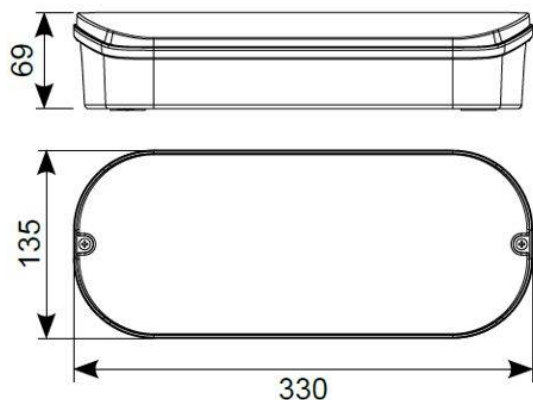

SPARES

ASBP/15/LI

6.4V 3000mAh Li-FePO4 Replacement Battery