



# Pace



Part of the Commercial Panels product category

**Model** Pace Backlit 600x600 Panel RGBW OCTO Smart Control  
**Code** APAC/60/1/RGBW/OCTO  
**Application** Commercial, Education, Healthcare, Hospitality, Retail

### GENERAL INFORMATION

Input	220-240V
Wattage	50W
Operating Temp	-20°C to 40 °C
Lumens Delivered	3900lm (White Output)
lm/W	110lm/W
CCT	4000K and RGB
Beam Angle	120

### MATERIAL INFORMATION

Main Material	Aluminium, PS Polycarbonate
Diffuser Material	PS Polycarbonate
Product Weight without Packaging	1.65 kg
Colour / Finish	White

### TECHNICAL INFORMATION


Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	5
CRI	80
Internal / External	Internal
Power Factor	0.9
L70 @ 25°C	L70 B50 54,000h

### PRODUCT FEATURES

- Backlit OCTO enabled LED panel suitable for education, commercial and ancillary area applications
- Slimline design allows for installation into shallow ceiling voids
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Create the ambience of your choice with 16 million colours, as well as 4000K cool white light
- Full dimming control and circadian rhythm option via Casambi App

### ACCESSORIES

ASMF60/1	Surface Mounting Frame 600x600
APACLED/SK	Pace Backlit Suspension Kit
APRK/60	600x600 Plasterboard Recessed Kit
AARX60K/1	ARX 600x600 Anti-Ligature Kit

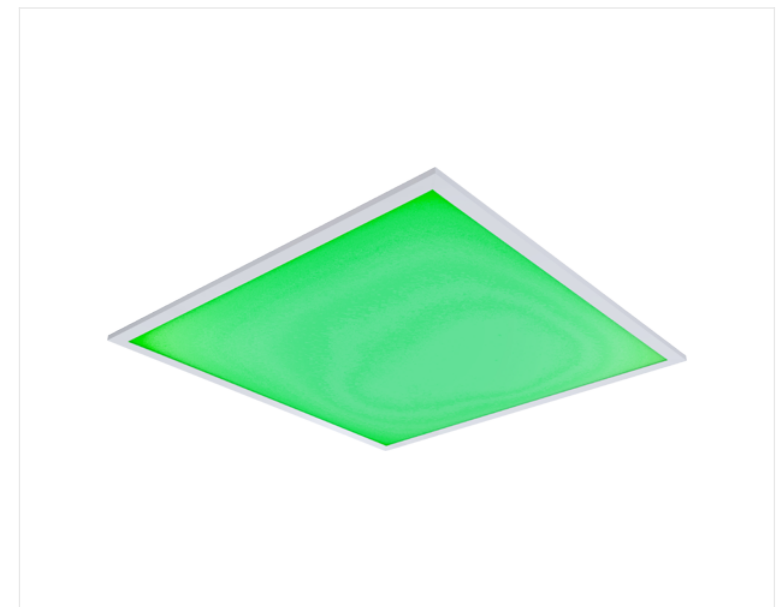



# Pace



Part of the Commercial Panels product category

<b>Model</b>	Pace Backlit 600x600 Panel RGBW OCTO Smart Control
<b>Code</b>	APAC/60/1/RGBW/OCTO
<b>Application</b>	Commercial, Education, Healthcare, Hospitality, Retail

