



Pace



Part of the Commercial Panels product category

Model Pace Backlit 600x600 Panel UGR<19 Cool White
Code APAC1/60/1/CW
Application Ancillary, Commercial, Education, Healthcare, Industrial, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	28W
Operating Temp	-20°C - 40°C
Lumens Delivered	3400lm
lm/W	120lm/W
CCT	4000K
UGR	18
Beam Angle	90

MATERIAL INFORMATION

Main Material	Aluminium
Diffuser Material	Polystyrene
Product Weight without Packaging	1.553 kg
Colour / Finish	White
Height	32 mm

TECHNICAL INFORMATION


Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Ceiling, Recessed, Suspended
Power Factor	0.9
L70 @ 25°C	L70 B50 60,000h

PRODUCT FEATURES

- Backlit LED panel suitable for education, commercial and ancillary area applications
- Slimline design allows for installation into shallow ceiling voids
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Dimmable and OCTO options available
- TPa as standard

ACCESSORIES

APOD/1/3NM/DA	Panel Pod PRO DALI
APACLED/SK	Pace Backlit Suspension Kit
ASMF60/1	Surface Mounting Frame 600x600
APRK/60	600x600 Plasterboard Recessed Kit
AARX60K/1	ARX 600x600 Anti-Ligature Kit
ASRF/60/1	600x600 Skylight Recessed Frame
ADDIM/30/MC	Multi-current Dimmable Driver 30W
AIRMLED/POD/3NM/ST	Panel Pod Self-Test Emergency
AIRMLED/POD/MWS	Panel Pod Sensor

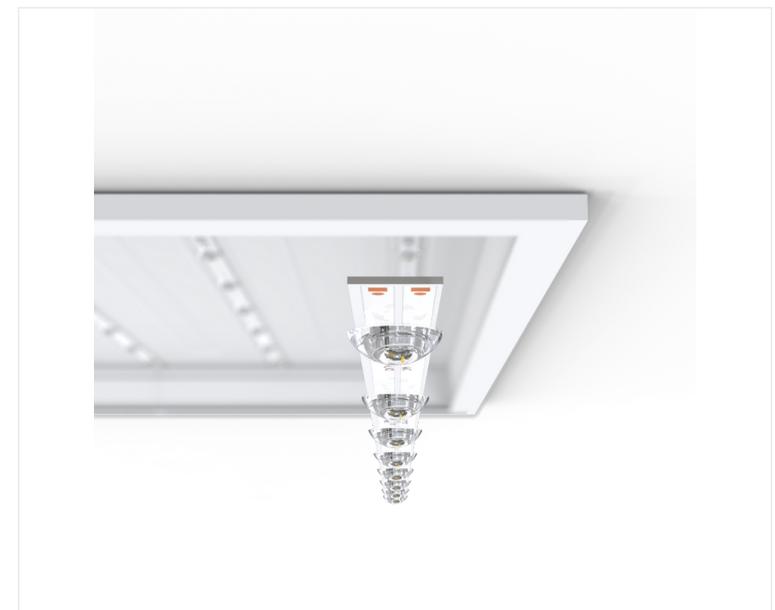



Pace



Part of the Commercial Panels product category

Model Pace Backlit 600x600 Panel UGR<19 Cool White
Code APAC1/60/1/CW
Application Ancillary, Commercial, Education, Healthcare, Industrial, Retail

