



Pace



Part of the Commercial Panels product category

Model Pace Plus 600x600 Multi Wattage Cool White
Code APACP/60/CW
Application Ancillary, Commercial, Education, Healthcare, Industrial, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	12W - 18W
Operating Temp	-20°C - 40°C
Lumens Delivered	2100lm - 3100lm
lm/W	180lm/W
CCT	4000K
UGR	18
Beam Angle	80

MATERIAL INFORMATION

Main Material	Aluminium
Diffuser Material	TPA
Product Weight without Packaging	2.431 kg
Colour / Finish	White
Height	47 mm

TECHNICAL INFORMATION


Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Ceiling, Recessed, Suspended
Power Factor	0.9
L70 @ 25°C	L70 B50 54,000h

PRODUCT FEATURES

- Industry leading super high efficiency (up to 180lm/W) backlit LED panel suitable for education, commercial and ancillary area applications
- Slimline design allows for installation into shallow ceiling voids
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Power selectable; offering a choice of 4 outputs, in one luminaire
- Dimmable and OCTO options available

ACCESSORIES

APOD/1/3NM/DA	Panel Pod PRO DALI
APACLED/SK	Pace Backlit Suspension Kit
APRK/60	600x600 Plasterboard Recessed Kit
AARX60K/1	ARX 600x600 Anti-Ligature Kit
ASRF/60/1	600x600 Skylight Recessed Frame
ADDIM/30/MC	Multi-current Dimmable Driver 30W
AIRMLED/POD/3NM/ST	Panel Pod Self-Test Emergency
AIRMLED/POD/MWS	Panel Pod Sensor

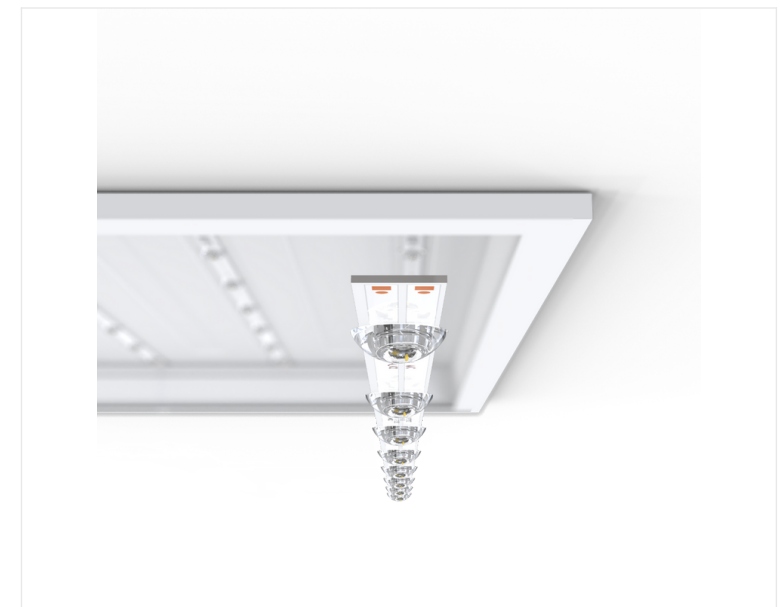



Pace



Part of the Commercial Panels product category



Model Pace Plus 600x600 Multi Wattage Cool White
Code APACP/60/CW
Application Ancillary, Commercial, Education, Healthcare, Industrial, Retail

