



Prism Pro

Part of the Downlights product category



Model	Prism Pro CCT Anti Glare Fire Rated Downlight Dual Wattage
Code	APRIPAG/1
Application	Ancillary, Hospitality, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	5W - 7W
Operating Temp	-20°C - 35°C
Lumens Delivered	450lm - 580lm (4000K)
lm/W	90lm/W - 80lm/W (4000K)
CCT	2700/3000/4000/6000K
UGR	20
Beam Angle	55

MATERIAL INFORMATION

Main Material	Aluminium
Diffuser Material	Polycarbonate
Product Weight without Packaging	0.285 kg
Colour / Finish	White
Diameter	88 mm
Height	85 mm

TECHNICAL INFORMATION



Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.85
L70 @ 25°C	L70 B50 60,000h

PRODUCT FEATURES

- 220-240V IP65 LED dimmable CCT fire rated architectural downlight suitable for residential and hospitality applications
- CCT selectable between 2700K, 3000K, 4000K and 6000K and power selectable; offering a choice of 2 outputs, in one luminaire
- Supplied with matt white bezel as standard. Chrome, satin chrome and matt black bezels sold separately
- Anti-glare design to create visual comfort
- New innovative 2 part detachable connector design allows initial wiring and testing to be completed first, then simply plug the downlight back to the connector, ensuring a quick and simple installation

ACCESSORIES

APRILEDPBZ/AG/WW	Prism Pro CCT Anti-Glare Bezel White & White
APRILEDPBZ/AG/SCB	Prism Pro CCT Anti-Glare Bezel Satin Chrome & Black
APRILEDPBZ/AG/CHB	Prism Pro CCT Anti-Glare Bezel Chrome & Black
APRILEDPBZ/AG/BB	Prism Pro CCT Anti-Glare Bezel Black & Black

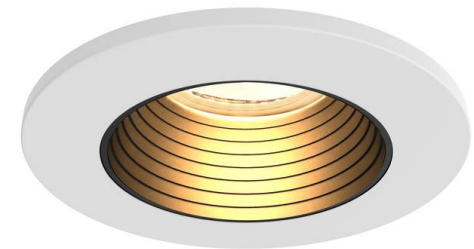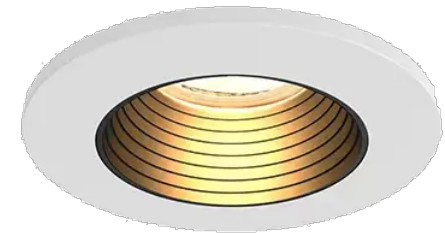



Prism Pro



Part of the Downlights product category

Model	Prism Pro CCT Anti Glare Fire Rated Downlight Dual Wattage
Code	APRIPAG/1
Application	Ancillary, Hospitality, Residential, Retail

