



Primo Mini

Part of the Track Lighting product category



Model	Primo Mini 24V Globe Pendant Warm White
Code	APRM/GP/1/WW
Application	Commercial, Residential, Retail

GENERAL INFORMATION

Input	24V
Wattage	4W
Operating Temp	-20°C - 40°C
Lumens Delivered	350lm
lm/W	90lm/W
CCT	3000K
Beam Angle	300

MATERIAL INFORMATION

Main Material	Aluminium
Diffuser Material	Polycarbonate
Product Weight without Packaging	0.37 kg
Colour / Finish	Black
Diameter	120 mm
Height	1,134 mm

TECHNICAL INFORMATION


Class Protection	3
Light Source	LED
SDCM (Initial Macadam)	3
CRI	90
Internal / External	Internal
Surface / Recessed / Suspended	Surface, Suspended
L70 @ 25°C	L70 60,000h

PRODUCT FEATURES

- Architectural and diverse pendant range to cater for a vast range of interiors, suitable for use in hospitality and residential applications
- High CRI 90 and SDCM3 ensures the highest quality white light output

ACCESSORIES

AD240/24V	240W 24V Driver
APRM/LE/1/B	Primo Mini 24V Live End Black
APRM/EC/1/B	Primo Mini 24V End Caps Black
ADDIM100/24V	100W 24V Triac Dimmable LED Driver
ADDIM100/24V/DD	100W 24V Push-Dim, DALI Dimmable Driver
APRM/TI/1/B	Primo Mini 24V Track Insert Black
APRM/SC/1/B	Primo Mini 24V Straight Connector Black
ADDIM200/24V/DD	200W 24V Push-Dim, DALI Dimmable Driver
AOCTOW/12-24V/DIM	OCTO WIZ Connected 12-24V Dimmable Controller
APRM/FC/1/B	Primo Mini 24V Flexible Connector Black

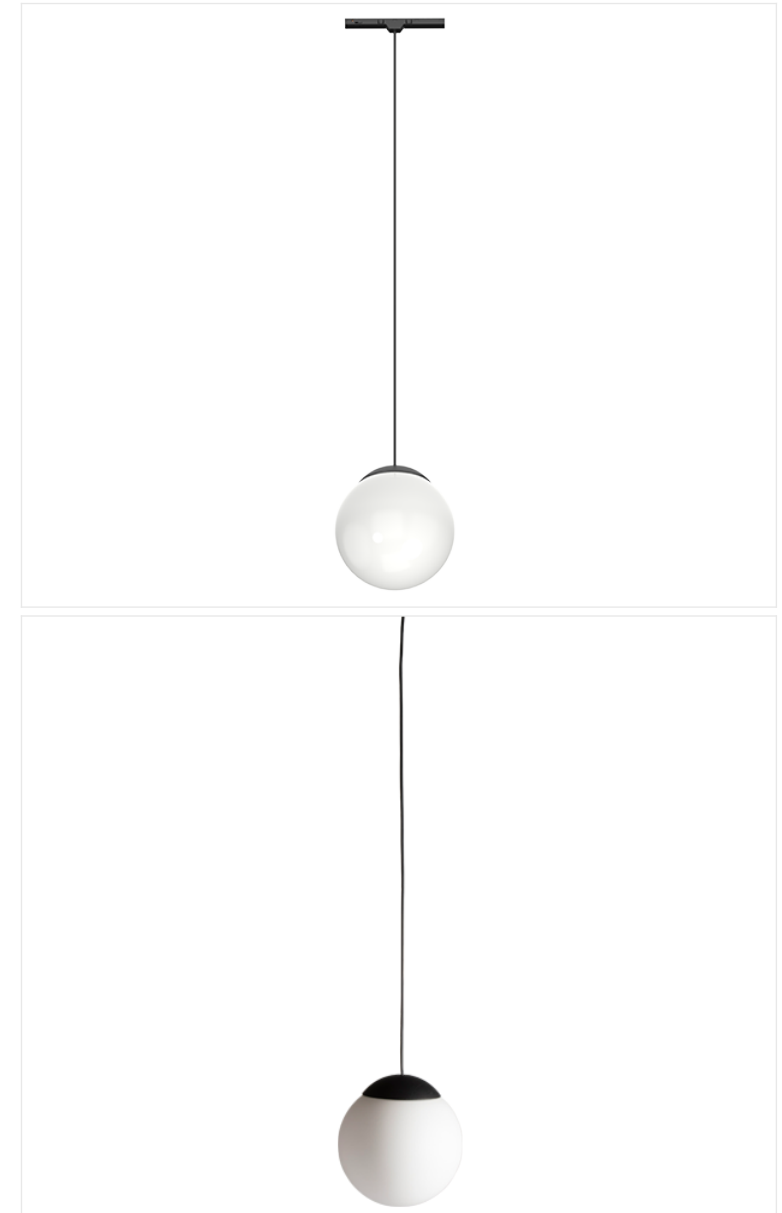



Primo Mini

Part of the Track Lighting product category



Model	Primo Mini 24V Globe Pendant Warm White
Code	APRM/GP/1/WW
Application	Commercial, Residential, Retail

