



Quadro



Part of the Commercial Panels product category

Model	Quadro CCT Recessed Modular
Code	AQUAD/1
Application	Ancillary, Commercial, Education, Healthcare, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	20W - 36W
Operating Temp	-10°C - 45°C
Lumens Delivered	2600lm - 4300lm (4000K)
lm/W	130lm/W
CCT	3000K/4000K/6500K
UGR	19
Beam Angle	90

MATERIAL INFORMATION

Main Material	Steel
Diffuser Material	Polycarbonate Tp(a)
Colour / Finish	White
Height	55 mm

TECHNICAL INFORMATION


Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.9
L70 @ 25°C	L70 54,000h

PRODUCT FEATURES

- Modern feature LED panel suitable for education, commercial and healthcare applications
- CCT selectable between 3000K, 4000K and 6500K and power selectable; offering a choice of 4 outputs, in one luminaire
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Switch Dim, DALI and 1-10V dimming, Tunable White and OCTO options available
- Compatible with either the self-test panel pod or the sensor pod

ACCESSORIES

AIRMLD/POD/3NM/ST	Panel Pod Self-Test Emergency
AIRMLD/POD/MWS	Panel Pod Sensor
APOD/1/3NM/DA	Panel Pod PRO DALI
ASMF60/2	ASMF60/2x80

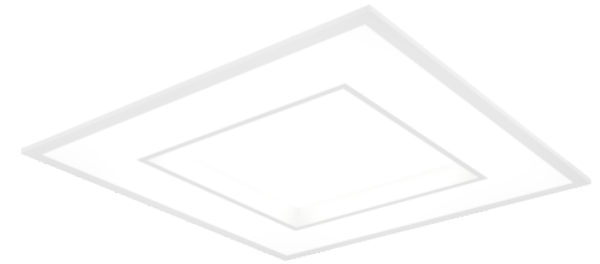



Quadro



Part of the Commercial Panels product category

Model	Quadro CCT Recessed Modular
Code	AQUAD/1
Application	Ancillary, Commercial, Education, Healthcare, Retail

