



| | |
|----------------------|-------------------------------------------------------------------------------|
| Category | Emergency |
| Application | Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail |
| Specification | Performance |

Raven

Raven Emergency Downlight Non-Maintained Open Area White

Code: ARALED/OA/3NM/ST



PRODUCT FEATURES

- Recessed Self-test emergency downlight with self-contained inverter and battery pack
- Option of escape route or open area models
- Pre-wired with 150mm rubber insulated cable for ease of installation
- Integral components for fast-fit installation
- High performance optic design
- Up to 15 metres spacing between luminaires

GENERAL INFORMATION

| | |
|-----------------------------------------|-------------------|
| Wattage | 3W |
| Lumens Delivered | 130lm (Emergency) |
| Beam Angle | 45 |
| CRI | 70 |
| CCT | 6500K |
| Input | 220/240V |
| Operating Temp | 0°C - 40°C |
| SDCM | 6 |
| Cut-Out Size | 95mm |
| Product Weight without Packaging | 0.28 kg |

TECHNICAL INFORMATION

| | |
|---------------------------------------|-------------|
| Light Source | LED |
| Colour / Finish | White |
| IP Rating | IP65 |
| Class Protection | 1 |
| Internal / External | Internal |
| Surface / Recessed / Suspended | Recessed |
| Lumen Depreciation | L70 50,000h |
| Warranty (Years) | 5 |
| CE Mark | Yes |
| Diameter | 110 mm |
| Height | 98 mm |
| Emergency Output Duration | 3 Hr |





| | |
|----------------------|-------------------------------------------------------------------------------|
| Category | Emergency |
| Application | Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail |
| Specification | Performance |

Raven

Raven Emergency Downlight Non-Maintained Open Area White

Code: ARALED/OA/3NM/ST

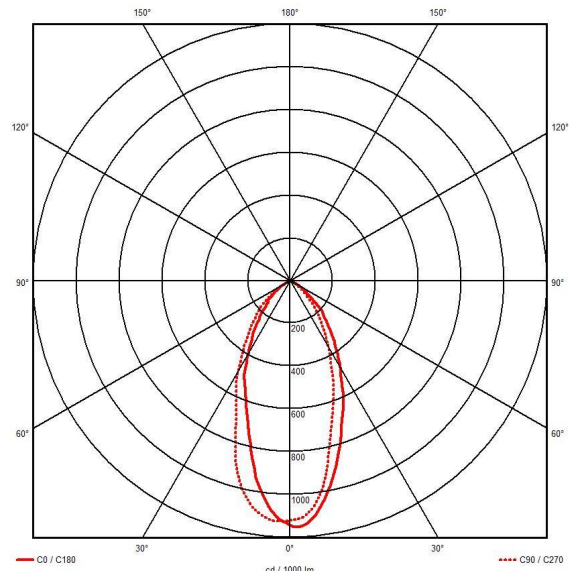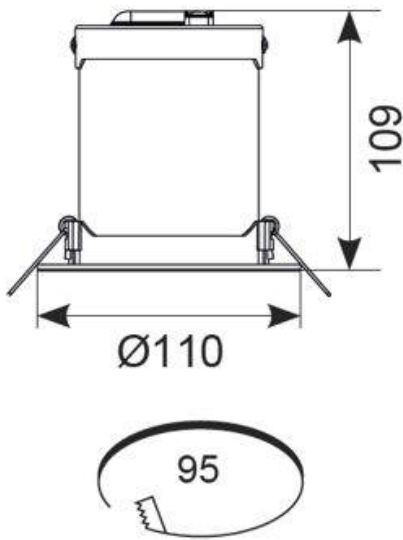

| SPARES | |
|------------|-------------------------------------------|
| ASBP/14/LI | 3.2V 3000mAh Li-FeP04 Replacement Battery |

