



Signal Pro

Part of the Emergency product category



Model Signal Pro Emergency Downlight Non-Maintained
Code ASPRLED/LI/3M/DA
Application Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	2.5W
Operating Temp	0°C - 40°C
Lumens Delivered	240lm(OA) / 230lm(ER)
lm/W	115lm/W
CCT	6000K+/- 5000K
Beam Angle	Open area - 144° Escape route - 143°x120°

MATERIAL INFORMATION


Product Weight without	0.441 kg
Packaging	
Colour / Finish	White
Diameter	84 mm
Height	35 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	6
CRI	Ra 70
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.34
L70 @ 25°C	L70 B50 72,000h

PRODUCT FEATURES

- LiFePO4 Lithium battery provides enhanced product lifetime
- Supplied with open area and escape route interchangeable lenses
- High specification optic design and performance allows increased spacing providing reduced cost
- DALI emergency as standard
- 70mm to 120mm cut-out

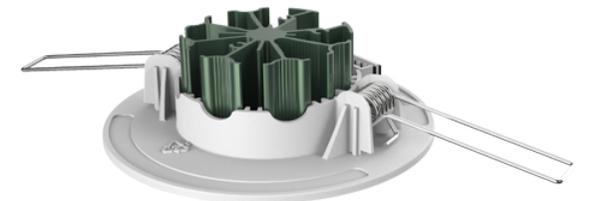



Signal Pro



Part of the Emergency product category

- Model** Signal Pro Emergency Downlight Non-Maintained
- Code** ASPRLED/LI/3M/DA
- Application** Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail

