




Signal Pro Emergency Downlight Non-Maintained

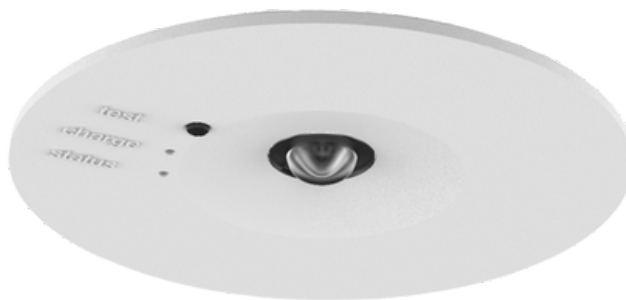

- LiFePO4 Lithium battery provides enhanced product lifetime
- Supplied with open area and escape route interchangeable lenses
- High specification optic design and performance allows increased spacing providing reduced cost
- DALI emergency as standard
- 70mm to 120mm cut-out
- If not connected to DALI network Self-test mode operates automatically

Features

Feature 1	LiFePO4 Lithium battery provides enhanced product lifetime
Feature 2	Supplied with open area and escape route interchangeable lenses
Feature 3	High specification optic design and performance allows increased spacing providing reduced cost
Feature 4	DALI emergency as standard
Feature 5	70mm to 120mm cut-out
Feature 6	If not connected to DALI network Self-test mode operates automatically



General Information

Lamp Type	LED
Emergency	Yes
Self Test	Yes
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Warranty (Years)	6
Material	Polycarbonate

Technical Information

Wattage	2.5W
Lumens Delivered	240lm(OA) / 230lm(ER)
Lm/W	115lm/W
Beam Angle	Open area - 144° Escape route - 143°x120°
CRI	70
CCT	6500K
Input	220/240V
Hertz	50/60Hz
Operating Temp	5°C - 40°C
Lumen Depreciation	L80 72,000h
Power Factor	0.32

