



Tornado Pro



Part of the Battens and Weatherproofs product category

Model	Tornado PRO 1500mm
Code	ATORPLED5
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	30W
Operating Temp	-10°C - 40°C
Lumens Delivered	3200lm
lm/W	111lm/W
CCT	4000K
Beam Angle	100/120

MATERIAL INFORMATION

Main Material	ABS
Diffuser Material	Polycarbonate
Product Weight without Packaging	1.72 kg
Colour / Finish	Grey
Height	70 mm

TECHNICAL INFORMATION


Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling, Suspended
Power Factor	0.9
L70 @ 25°C	L70 B50 54,000h

PRODUCT FEATURES

- Ultra slim IP65 LED robust non-corrosive batten ideal for industrial applications and ancillary areas
- High efficiency up to 161 Lm/W
- Unique base design caters for multiple installation methods
- Installer friendly embedded features aid accurate and fast installation for any application
- Quick release LED array / gear tray assembly provides the installer the means to faster installation / maintenance

ACCESSORIES

ATORPLED/SSKIT/TWIN Tornado PRO 316L Stainless Steel Kit Twin

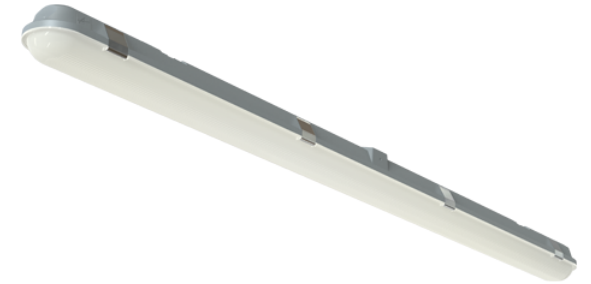



Tornado Pro



Part of the Battens and Weatherproofs product category

Model	Tornado PRO 1500mm
Code	ATORPLED5
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail

