



Unity Downlight

Part of the Downlights product category



Model 32W Unity S 4000K LED Downlight
Code AULED1/SQU
Application Ancillary, Commercial, Education, Hospitality, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	20.5
Operating Temp	-20°C - 25°C
Lumens Delivered	3100lm
lm/W	88lm/W
CCT	4000K
UGR	10
Beam Angle	40

MATERIAL INFORMATION


Main Material	Aluminium
Product Weight without	1.376 kg
Packaging	
Colour / Finish	White
Height	152 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	90
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.97
L70 @ 25°C	L70 B50 60,000h

PRODUCT FEATURES

- Square and Rectangular recessed adjustable architectural downlight suitable for commercial, hospitality and retail applications
- Fully adjustable tilt angle 30° on two axis
- Black trim provides excellent glare control
- Steel housing with die-cast aluminium body for good thermal management
- Remote driver with plug and play connection

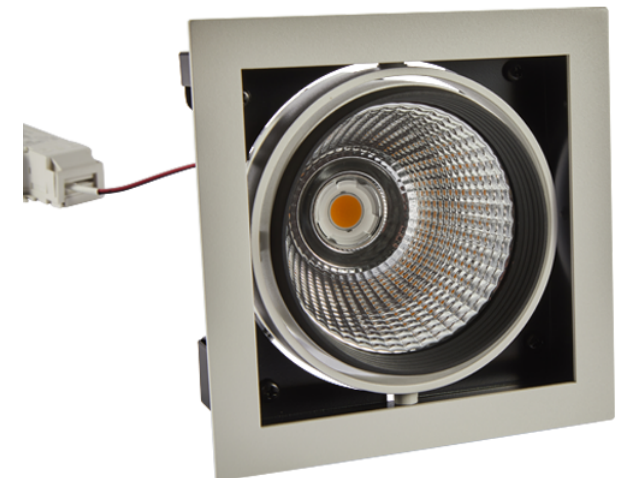



Unity Downlight



Part of the Downlights product category

- Model** 32W Unity S 4000K LED Downlight
- Code** AULED1/SQU
- Application** Ancillary, Commercial, Education, Hospitality, Residential, Retail

