




Unity 100

Unity 100 Wallwash Cool White DALI Code: AULED100WW/DD3

Category	Downlights	
Application	cation Ancillary, Commercial, Education, Hospitality,	
	Residential, Retail	
Specification	Architectural	

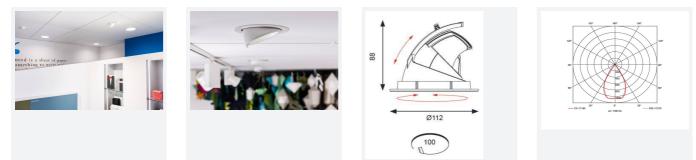

PRODUCT FEATURES

- Recessed adjustable architectural wallwash with 355° rotation suitable for commercial, hospitality and retail applications
- + 30° cut-off angle in the horizontal position
- Remote driver with plug and play connection
- Powered by Tridonic

GE	NERAL INFORMATION
Wattage	15W
Lumens Delivered	1300lm
Lm/W	84lm/W
Beam Angle	55
CRI	90
CCT	4000K
Input	220-240V
Operating Temp	-20°C - 25°C
SDCM	3
UGR	17
Cut-Out Size	100mm
Product Weight without Packaging	1.007 kg

TECHNICAL INFORMATION			
Light Source	LED		
Colour / Finish	White		
IP Rating	IP20		
Class Protection	2		
Internal / External	Internal		
Surface / Recessed / Suspended	Recessed		
Lumen Depreciation	L70 60,000h		
Warranty (Years)	5		
CE Mark	Yes		
Diameter	112 mm		
Height	88 mm		

- Adjustable tilt angle from -1.5° to 45°
- · Die-cast aluminium body and heatsink for good thermal management
- Dimmable options

