Unity Wallwash

Part of the Downlights product category

5YR | IP20 | ON-SITE WARRANTY 2 YEARS

Model	26W Unity 150 4000K LED Wallwash
Code	AULED150WW
Application	Ancillary, Commercial, Education, Hospitality, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	28
Operating Temp	-20°C - 25°C
Lumens Delivered	2700lm
lm/W	93lm/W
CCT	4000K
UGR	16
Beam Angle	55

MATERIAL INFORMATION

Main Material	Aluminium
Product Weight without Packaging	0.766 kg
Colour / Finish	White
Diameter	162 mm
Height	138 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	90
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.98
L70 @ 25°C	L70 B50 60,000h

PRODUCT FEATURES

- Recessed adjustable architectural wallwash with 355° rotation suitable for commercial, hospitality and retail applications
- Adjustable tilt angle from -15° to 45°
- 30° cut-off angle in the horizontal position
- Die-cast aluminium body and heatsink for good thermal management
- Remote driver with plug and play connection

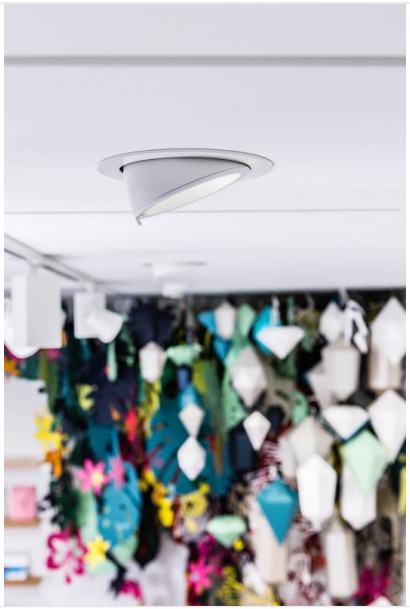

Unity Wallwash

Part of the Downlights product category

Model	26W Unity 150 4000K LED Wallwash
Code	AULED150WW
Application	Ancillary, Commercial, Education, Hospitality, Residential, Retail

