



Unity Wallwash

Part of the Downlights product category



| | |
|--------------------|--|
| Model | 26W Unity 150 4000K LED Wallwash |
| Code | AULED150WW |
| Application | Ancillary, Commercial, Education, Hospitality, Residential, Retail |

GENERAL INFORMATION

| | |
|-------------------------|--------------|
| Input | 220-240V |
| Wattage | 28 |
| Operating Temp | -20°C - 25°C |
| Lumens Delivered | 2700lm |
| lm/W | 93lm/W |
| CCT | 4000K |
| UGR | 16 |
| Beam Angle | 55 |

MATERIAL INFORMATION


| | |
|-------------------------------|-----------|
| Main Material | Aluminium |
| Product Weight without | 0.766 kg |
| Packaging | |
| Colour / Finish | White |
| Diameter | 162 mm |
| Height | 138 mm |

TECHNICAL INFORMATION

| | |
|---------------------------------------|-----------------|
| Class Protection | 2 |
| Light Source | LED |
| SDCM (Initial Macadam) | 3 |
| CRI | 90 |
| Internal / External | Internal |
| Surface / Recessed / Suspended | Recessed |
| Power Factor | 0.98 |
| L70 @ 25°C | L70 B50 60,000h |

PRODUCT FEATURES

- Recessed adjustable architectural wallwash with 355° rotation suitable for commercial, hospitality and retail applications
- Adjustable tilt angle from -15° to 45°
- 30° cut-off angle in the horizontal position
- Die-cast aluminium body and heatsink for good thermal management
- Remote driver with plug and play connection

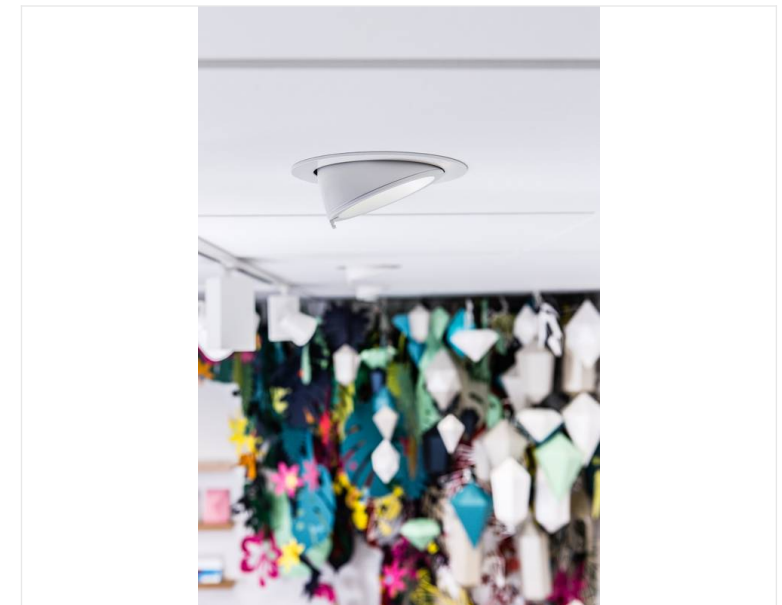



Unity Wallwash



Part of the Downlights product category

| | |
|--------------------|--|
| Model | 26W Unity 150 4000K LED Wallwash |
| Code | AULED150WW |
| Application | Ancillary, Commercial, Education, Hospitality, Residential, Retail |

