




Unity 175

Unity 175 Wallwash Code: AULED175WW/WW

Category	Downlights	
Application	Ancillary, Commercial, Education, Hospitality,	
	Residential, Retail	
Specification	Architectural	

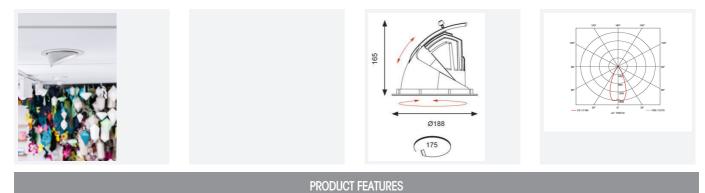

- Recessed adjustable architectural wallwash with 355° rotation suitable for commercial, hospitality and retail applications
- 30° cut-off angle in the horizontal position
- Remote driver with plug and play connection
- Powered by Tridonic

GENERAL INFORMATION			
Wattage	35W		
Lumens Delivered	2900lm		
Lm/W	78lm/W		
Beam Angle	55		
CRI	90		
CCT	3000K		
Input	220/240V		
Operating Temp	-20°C - 25°C		
SDCM	3		
UGR	16		
Cut-Out Size	175mm		
Product Weight without Packaging	0.774 kg		

TECHNICAL INFORMATION		
Light Source	LED	
Colour / Finish	White	
IP Rating	IP20	
Class Protection	2	
Internal / External	Internal	
Surface / Recessed / Suspended	Recessed	
Lumen Depreciation	L80 60,000h	
Warranty (Years)	5	
CE Mark	Yes	
Diameter	188 mm	
Height	165 mm	

- Adjustable tilt angle from -1.5° to 45°

- · Die-cast aluminium body and heatsink for good thermal management
- Dimmable options

