



Unity Downlight

Part of the Downlights product category



Model 13W Unity 80 4000K LED Gimbal
Code AULED80GIM
Application Ancillary, Commercial, Education, Hospitality, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	15
Operating Temp	-20°C - 25°C
Lumens Delivered	1200lm
lm/W	80lm/W
CCT	3000K
UGR	18
Beam Angle	55

MATERIAL INFORMATION


Main Material	Aluminium
Product Weight without	0.315 kg
Packaging	
Colour / Finish	White
Diameter	90 mm
Height	73 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	90
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.55
L70 @ 25°C	L70 B50 60,000h

PRODUCT FEATURES

- IP44 (downlight only) compact high performance architectural downlight and gimbal suitable for commercial, hospitality and retail applications
- 30° tilt angle (gimbal only)
- Die-cast aluminium construction, powder coated and 30° cut-off angle
- Mirror finished anodized reflector
- Anti-glare design to create visual comfort

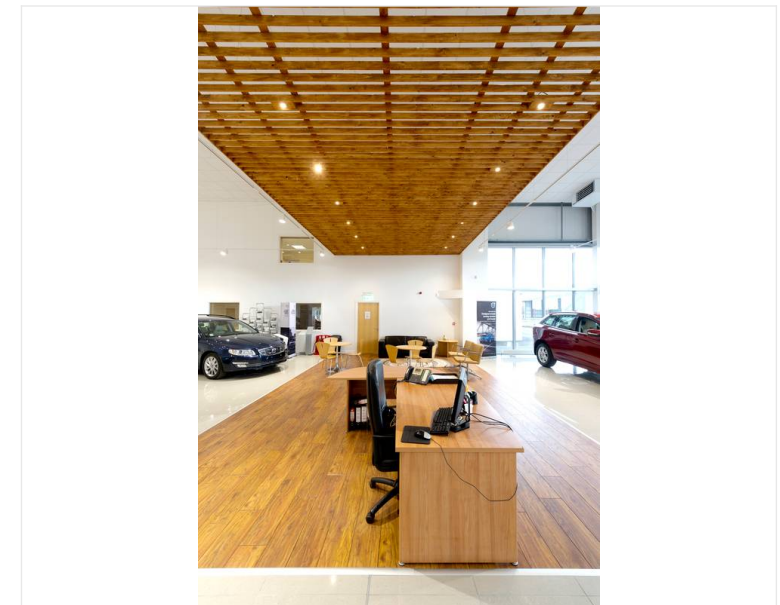



Unity Downlight



Part of the Downlights product category

- Model** 13W Unity 80 4000K LED Gimbal
- Code** AULED80GIM
- Application** Ancillary, Commercial, Education, Hospitality, Residential, Retail

