




# Unity GC Pro Fixed

Unity GC Pro 1 Fixed Downlight Warm White  
Code: AULEDGCP1/WW/OCTO

Category	Downlights
Application	Ancillary, Commercial, Education, Hospitality, Residential, Retail
Specification	Architectural

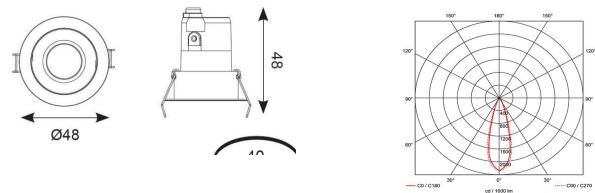

- Compact high performance architectural adjustable downlight suitable for residential applications
- Die-cast aluminium construction, powder coated
- Remote driver with plug and play connection

- Deep cut-off angle for glare control and comfort
- Mirror finished anodized reflector for optimum light control
- Powered by HEP

GENERAL INFORMATION		TECHNICAL INFORMATION	
Voltage	3W	Light Source	LED
Lumens Delivered	110lm	Colour / Finish	Matt White
Lm/W	38lm/W	IP Rating	IP44
Beam Angle	30	Class Protection	2
CRI	90	Internal / External	Internal
CCT	3000K	Surface / Recessed / Suspended	Recessed
Input	220-240V	Lumen Depreciation	L80 82,000h
Operating Temp	-20°C - 25°C	Warranty (Years)	5
SDCM	3	CE Mark	Yes
UGR	10	Diameter	48 mm
Cut-Out Size	40mm	Height	48 mm
Product Weight without Packaging	0.135 kg	Accessories	ACFLP/3

