




# Unity GC Pro Fixed

Unity GC Pro 2 Fixed Downlight Cool White Switch  
Code: AULEDGCP2/CW/DD1

Category	Downlights
Application	Ancillary, Commercial, Education, Hospitality, Residential, Retail
Specification	Architectural

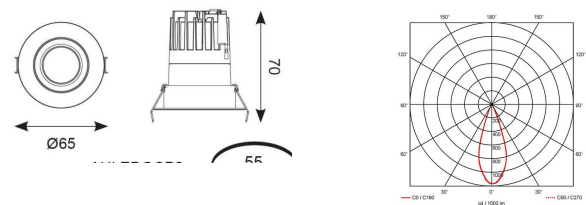

- Compact high performance architectural adjustable downlight suitable for residential applications
- Die-cast aluminium construction, powder coated
- Remote driver with plug and play connection
- Deep cut-off angle for glare control and comfort
- Mirror finished anodized reflector for optimum light control
- Powered by HEP

GENERAL INFORMATION	
Wattage	8W
Lumens Delivered	260lm
Lm/W	33lm/W
Beam Angle	30
CRI	90
CCT	4000K
Input	220-240V
Operating Temp	-20°C - 25°C
SDCM	3
UGR	10
Cut-Out Size	55mm
Product Weight without Packaging	2.77 kg

TECHNICAL INFORMATION	
Light Source	LED
Colour / Finish	Matt White
IP Rating	IP44
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lumen Depreciation	L80 82,000h
Warranty (Years)	5
CE Mark	Yes
Diameter	65 mm
Height	70 mm

